
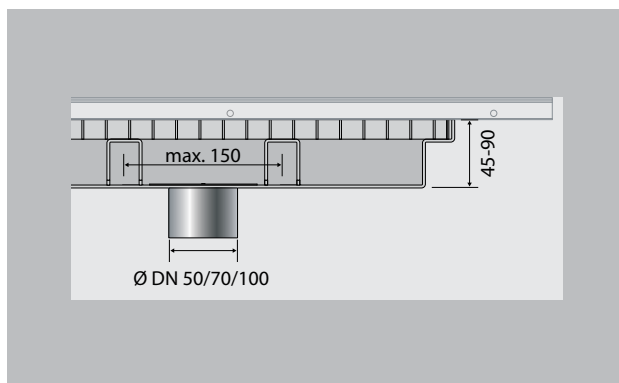


## Model 5000 AL+

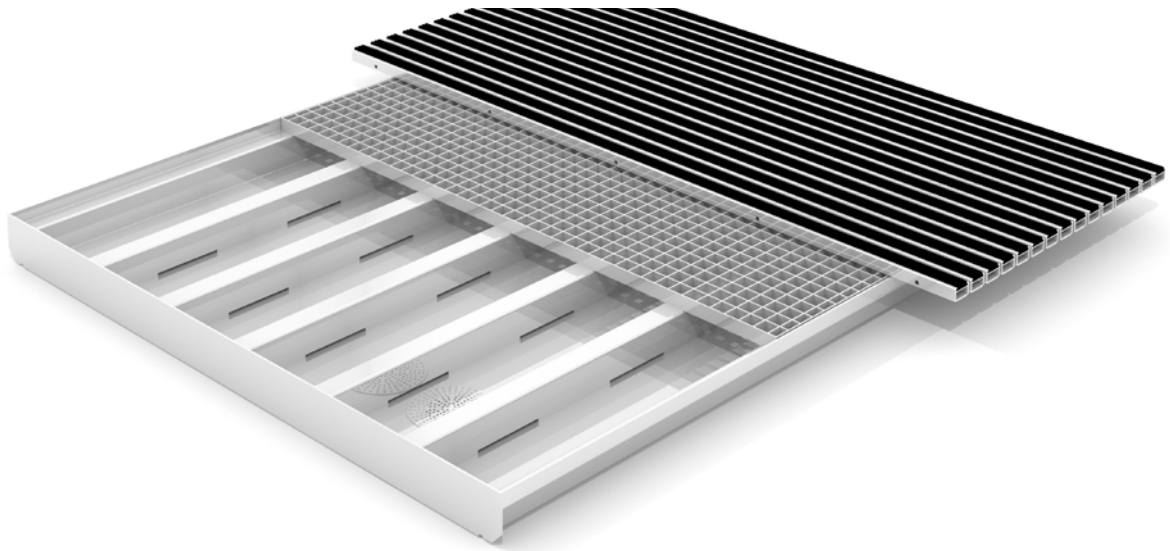

emco dirt collection wells are required to counter the increased dirt levels in heavily frequented entrance areas. Together with the emco MARSCHALL and emco Plaza entrance mats combined with a grid and support profiles in a narrow arrangement (not when combined with scraper bar or brush strip), they form a robust, unbeatable unit in terms of effective cleaning, high load capacity and practicality.

### Description

Dirt collection wells developed for emco MARSCHALL and emco PLAZA entrance mats for increased dirt uptake.



Outside  
(Zone 1)



Indoor and  
outdoor (co-  
vered, Zone  
1+2)



Street dust,  
hair, sand,  
ash, textile  
fibres, small  
leaves and  
twigs, loose  
chippings,  
coarse sand,  
small gravel  
particles



Damp street  
dust, damp  
sand deposits,  
dust, etc.

## Model 5000 AL+

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Weight (kg/m<sup>2</sup>)</b>                    | 37,1                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Suitable for</b>                                 | MARSCHALL 12<br>MARSCHALL 17<br>MARSCHALL 22<br>PLAZA 42<br>Also available in large variants.                                                                                                                                                                                                                                                                                                |
| <b>Roll-over and drive-over capability:</b>         | Prams<br>Sack-/hand truck<br>Wheelchairs<br>Light shopping trolleys<br>hand trolleys<br>pallet trucks<br>Electric lift truck                                                                                                                                                                                                                                                                 |
| <b>Approx. material thickness (mm)</b>              | 3,0                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Structure</b>                                    | A dirt collection well unit can be built up in modules consisting of either a single well or multiple wells which may vary in width and depth. From a visual and functional perspective, the entrance mat is commonly manufactured with a frame.                                                                                                                                             |
| <b>Freedom to create your own individual design</b> | In spite of the rectangular shape of the wells, no limits are placed on your creativity when it comes to tailoring the mat to your own specifications. Architecturally inviting entrances demand a harmoniously integrated entrance mat. In these cases, the wells are often only used in areas where the greatest amounts of dirt occur, and the entrance mats far exceed what is required. |

|                                        |                                                                                                                                                                                                                          |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                        | Aluminium, bonded and waterproof, interior completely smooth for easy cleaning. Also available in stainless steel (V2A) on request.                                                                                      |
| <b>Support profile</b>                 | Aluminium, stainless steel (V2A), max. spacing 150mm with recesses for all-around water drainage. These profiles must run laterally at an angle of 90° beneath the profiles.                                             |
| <b>Additional data</b>                 | There is no surrounding edging frame for the entrance mat. A frame can be added to the entrance mat you have chosen if required.                                                                                         |
| <b>Larger dimensions</b>               | Multiple well units are screwed together on site to make a single system.                                                                                                                                                |
| <b>Fittings</b>                        | Available on request with drainage system and water drainage connection for multiple well units. We recommend one drainage system per well unit for multiple well units.                                                 |
| <b>Drainage system</b>                 | Complete drainage system in sizes DN 50, DN 70 or DN 100, including stainless steel strainer. Standard size for the drainage system is DN 50.                                                                            |
| <b>Well overall height</b>             | Standard: 70 mm<br>Optional single-piece well: 45 90 mm<br>Optional multi-piece wells: 45 90 mm<br>Note: It is not possible to have a water drainage connection on multiple wells with a well height of less than 65 mm. |
| <b>Max. well width, one piece (mm)</b> | 2800                                                                                                                                                                                                                     |
| <b>Max. well depth, one piece (mm)</b> | 1300                                                                                                                                                                                                                     |

Subject to technical modifications