


## Model 512 PSL Innova K

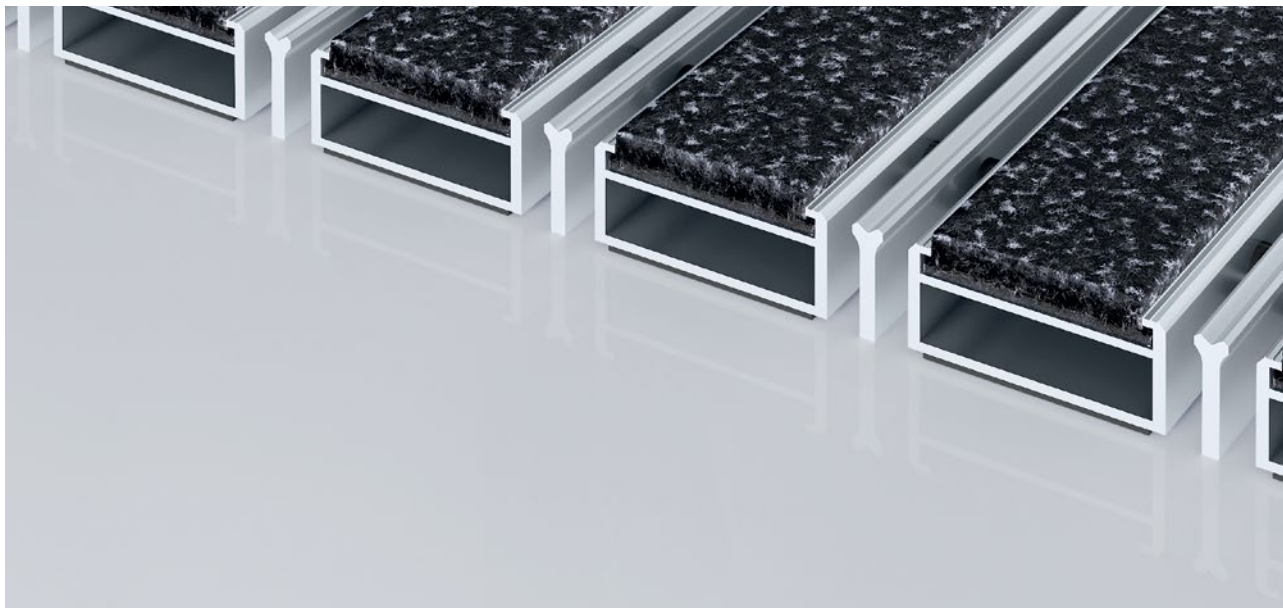

The extra-wide Premium entrance mat with the particularly adaptable Innova insert has a distinguished appearance and improves room acoustics. Particularly suitable for collecting fine dirt. The additional profile provides an extra cleaning effect. Ideal for buildings with normal to heavy loads.

**1** **2** **3** Indoor and outdoor  
(covered, Zone 1+2)

### Description

Rollable, extremely hard-wearing, premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Damp street dust, damp sand deposits, dust, etc.



5 years guarantee



Cfl-s1



Property suitable inlay 33

## Model 512 PSL Innova K

|                                                               |                                                                                                                                                                                        |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Approx. height (mm)</b>                                    | 12                                                                                                                                                                                     |
| <b>Roll-over and drive-over capability:</b>                   | Prams<br>Sack-/hand truck<br>Wheelchairs                                                                                                                                               |
| <b>Standard profile clearance approx. (mm)</b>                | 5 mm, rubber spacers                                                                                                                                                                   |
| <b>Automatic door systems</b>                                 | Profile gaps, for revolving doors, available in 3mm according to DIN EN 16005                                                                                                          |
| <b>Connection</b>                                             | Plastic-coated stainless steel cable                                                                                                                                                   |
| <b>Max. width/profile length for individual section (mm):</b> | 3000                                                                                                                                                                                   |
| <b>Profile width (mm)</b>                                     | 46.5                                                                                                                                                                                   |
| <b>Weight (kg/m<sup>2</sup>)</b>                              | 10,3                                                                                                                                                                                   |
| <b>Mat division as per factory standards</b>                  | From a profile length of 3000 mm or a maximum mat weight of 25 kg. For profile lengths above 2300 mm, a surcharge is applicable. Mat deviations/splits possible at customer's request. |
| <b>Support chassis</b>                                        | Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside                                                                                 |
| <b>Support chassis colour</b>                                 | Standard natural anodized Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel                                                        |
| <b>Tread surface</b>                                          | The exceptionally flexible Innova insert not only creates a sophisticated impression but also improves room acoustics. The additional profile increases the cleaning power.            |
| <b>Flammability</b>                                           | Insert with fire classification Cfl-s1 according to EN 13501.                                                                                                                          |
| <b>Pile material</b>                                          | 100% PA 6 (polyamide)                                                                                                                                                                  |
| <b>Use classification EN1307</b>                              | Property suitable inlay 33                                                                                                                                                             |

### Accessories

|                                                                          |
|--------------------------------------------------------------------------|
| emco installation frame 500: 500-15 AL Aluminium                         |
| emco installation frame 500: 500-15 CN Chrome-nickel steel (V2A)         |
| emco ramp edge: A12 Aluminium                                            |
| emco cover strip: C12 Chrome-nickel steel (V2A)                          |
| emco INOX®: LINEO 12 Chrome-nickel steel (V2A)                           |
| emco dirt collection well: 5512AL Aluminium                              |
| emco dirt collection well: 5512CN Chrome-nickel steel (V2A)              |
| Rubber underlay 1 mm: GU 1                                               |
| Rubber underlay 3 mm: GU 3                                               |
| Rubber underlay 5 mm: GU 5                                               |
| Mat joining brackets: MV Supplied as standard with mats in several parts |

### Suitable for:

|                                          |
|------------------------------------------|
| Retirement homes and Care-/Nursery Homes |
| medical practice                         |
| Offices and administrative buildings     |
| Family home                              |
| Retail sector                            |
| Hotel                                    |
| Kindergarten/Nursery                     |
| Apartment building                       |
| School                                   |
| Sports hall                              |

### Insert certified to TÜV PROFiCERT- product interior (Standard)

|                                                                     |
|---------------------------------------------------------------------|
| French VOC regulation                                               |
| LEED v4 (outside North America)                                     |
| BREEAM Exemplary Level                                              |
| Belgian VOC regulation                                              |
| AgBB (Committee for Health-related Evaluation of Building Products) |
| MVV TB Appendix 8, 9 / ABG                                          |

## **Model 512 PSL Innova K**

### **Service and services**

Construction site advice

Dimensioning

Measured using laser measuring device on site.

Installation service

Fitting and installation service

Repairs

The product can be disposed of or recycled in an environmentally friendly way.

## **Model 512 PSL Innova K**

### **Colours**



36.01 black



36.02 anthracite



36.03 grey

Warranty conditions are available at:  
[www.emco-bau.com/en/warranty-conditions/](http://www.emco-bau.com/en/warranty-conditions/)

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
[bau@emco.de](mailto:bau@emco.de) · [www.emco-bau.com](http://www.emco-bau.com)

