

## Model 512 PSL Maximus Image B


The extra-wide premium entrance mat with the Maximus Image insert for single-colour printing of individual colour preferences is the number-one choice for environments that call for a unique design and exceptional reduction of fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to extreme footfall.



Inside and outside (covered, Zone 2)



Extremely heavy

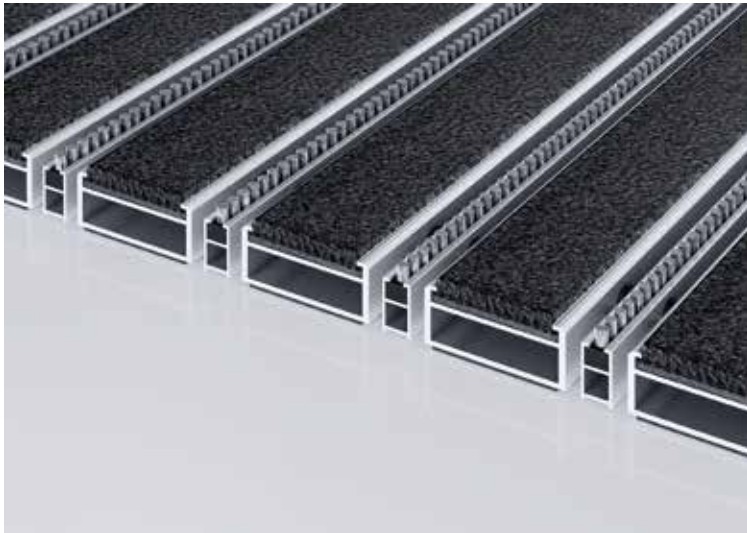

Inside and outside (covered, Zone 2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Damp street dust, damp sand deposits, dust, etc.



Highly suitable for property
























### Description

Rollable, extremely hard-wearing, premium entrance mat with extra-wide profile bars and performance insert for supported and self-supporting installation options. Suitable for single-colour printing of individual colour preferences. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



## Model 512 PSL Maximus Image B

### Colours

					
I10 Lemon	I20 Yellow	I30 Yellow/orange	I40 Orange	I50 Terracotta	I60 Red
					
I70 Oxide red	I80 Bordeaux	I90 Light red	I100 Cherry	I110 Purple	I120 Lilac
					
I130 Grape	I140 Magenta	I150 Peach	I160 Royal blue	I170 Light blue	I180 Petrol blue
					
I190 Emerald green	I200 Marine blue	I210 Dark green	I220 Mint	I230 Leaf green	I240 Reed green
					
I250 Green	I260 Brown	I270 Graphite	I280 Steel blue	I290 Light blue	I300 Silver
					
I310 Fawn brown	I320 Sand	I330 Chestnut	I340 Grey beige	I350 Blue grey	I360 Light grey
					
I370 Grey	I380 Dark grey	I390 Black	I400 White*	I410 Steel grey	I420 Gold
					
I430 Salmon pink	I440 Light green	I450 Sunset	grey	Black	

## Model 512 PSL Maximus Image B

<b>Approx. height (mm)</b>	22
<b>Roll-over and drive-over capability:</b>	Wheelchairs Prams hand trolleys
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers
<b>Automatic door systems</b>	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005
<b>Connection</b>	Plastic-coated stainless steel cable
<b>Max. width/profile length for individual section (mm):</b>	3000
<b>Depth/walking depth for individual section (mm):</b>	800
<b>Weight (kg/m<sup>2</sup>)</b>	14,4
<b>Mat divisions as per factory standards or customer specifications</b>	As of a profile length of 3000 mm or a maximum mat weight of 45 kg
<b>Support chassis</b>	Reinforced support chassis made using rigid aluminium with Premium sound absorbing insulation on the underside
<b>Tread surface</b>	Embedded, robust MAXIMUS inserts in Bfl-S1 quality (clean-off floor covering made from special polyamide yarn, 100%)
<b>Pile material</b>	100% PA 6.6 (polyamide)
<b>Load class</b>	Suitable for buildings 32

<b>Suitable for:</b>
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall

# Model 512 PSL Maximus Image B

### Service and services

Measured using laser measuring device on site.

Fitting and installation service

Construction site advice

Dimensioning

Installation service

Repairs

### Accessories

emco installation frame 500: 500-25 AL Aluminium

emco ramp edge: A17 Aluminium

emco cover strip: C22 Chrome-nickel steel (V2A)

emco LUMINA: LUMINA + LED Aluminium

emco LUMINA: LUMINA Aluminium

emco T-profile: T22

emco INOX®: LINEO 22 Chrome-nickel steel (V2A)

emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

emco installation frame 500: 500-25 MS Natural brass

emco LUMINA: LUMINA VIA Aluminium

Mat joining brackets: MV Supplied as standard with mats in several parts

Rubber underlay GU 1

Rubber underlay GU 3

Rubber underlay GU 5