


## Model 512 PSL Outdoor K



The extra-wide, weatherproof Premium entrance mat with the Outdoor insert for the noticeably thorough removal of coarse dirt. The additional profile provides an extra cleaning effect. Ideal for buildings with normal to heavy loads.

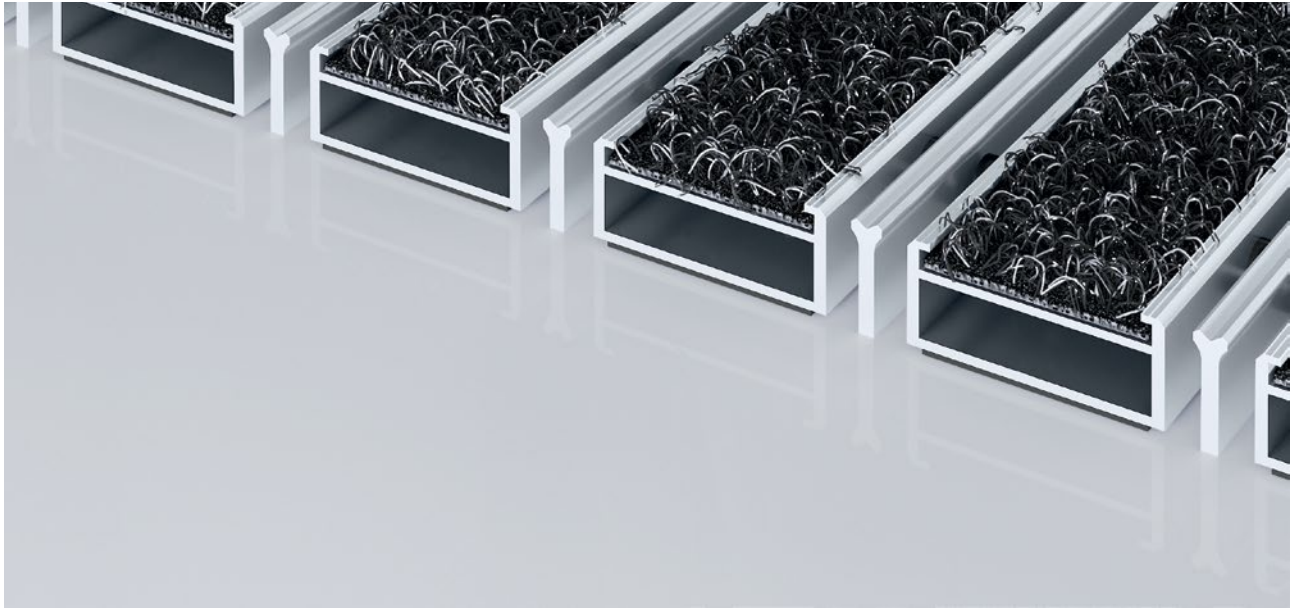

Indoor and outdoor  
(covered, Zone 1+2)

### Description

Rollable, extremely hard-wearing, premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



5 years guarantee



Property suitable inlay 33

# emco MARSCHALL Premium Large With Outdoor insert and scraping edge

## Model 512 PSL Outdoor K

|                                                               |                                                                                                                                                                                        |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Approx. height (mm)</b>                                    | 12                                                                                                                                                                                     |
| <b>Roll-over and drive-over capability:</b>                   | Prams<br>Sack-/hand truck<br>Wheelchairs                                                                                                                                               |
| <b>Standard profile clearance approx. (mm)</b>                | 5 mm, rubber spacers                                                                                                                                                                   |
| <b>Revolving door drives</b>                                  | Our mats with a profile spacing of 3mm in accordance with DIN EN 16005 are available for revolving door drives.                                                                        |
| <b>Connection</b>                                             | Thanks to plastic-coated steel cable                                                                                                                                                   |
| <b>Max. width/profile length for individual section (mm):</b> | 3000                                                                                                                                                                                   |
| <b>Profile width (mm)</b>                                     | 46.5                                                                                                                                                                                   |
| <b>Weight (kg/m<sup>2</sup>)</b>                              | 10,0                                                                                                                                                                                   |
| <b>Mat division as per factory standards</b>                  | From a profile length of 3000 mm or a maximum mat weight of 25 kg. For profile lengths above 2300 mm, a surcharge is applicable. Mat deviations/splits possible at customer's request. |
| <b>Support chassis</b>                                        | Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside                                                                                 |
| <b>Support chassis colour</b>                                 | Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel                                                                                  |
| <b>Tread surface</b>                                          | The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile increases the cleaning power.                                              |
| <b>Flammability</b>                                           | Insert with fire classification Cfl-s1 according to EN 13501.                                                                                                                          |
| <b>Pile material</b>                                          | 100% PA 6 (polyamide)                                                                                                                                                                  |
| <b>Use classification EN1307</b>                              | Property suitable inlay 33                                                                                                                                                             |

### Accessories

|                                                                          |
|--------------------------------------------------------------------------|
| emco dirt collection well: 5512AL Aluminium                              |
| emco dirt collection well: 5512CN Chrome-nickel steel (V2A)              |
| Rubber underlay 1 mm: GU 1                                               |
| Rubber underlay 3 mm: GU 3                                               |
| Rubber underlay 5 mm: GU 5                                               |
| Mat joining brackets: MV Supplied as standard with mats in several parts |

### Suitable for:


|                                          |
|------------------------------------------|
| Retirement homes and Care-/Nursery Homes |
| medical practice                         |
| Offices and administrative buildings     |
| Family home                              |
| Retail sector                            |
| Hotel                                    |
| Kindergarten/Nursery                     |
| Apartment building                       |
| School                                   |
| Sports hall                              |

### Service and services

|                                                                                |
|--------------------------------------------------------------------------------|
| Construction site advice                                                       |
| Dimensioning                                                                   |
| Measured using laser measuring device on site.                                 |
| Installation service                                                           |
| Fitting and installation service                                               |
| Repairs                                                                        |
| The product can be disposed of or recycled in an environmentally friendly way. |

## **Model 512 PSL Outdoor K**

### **Colours**

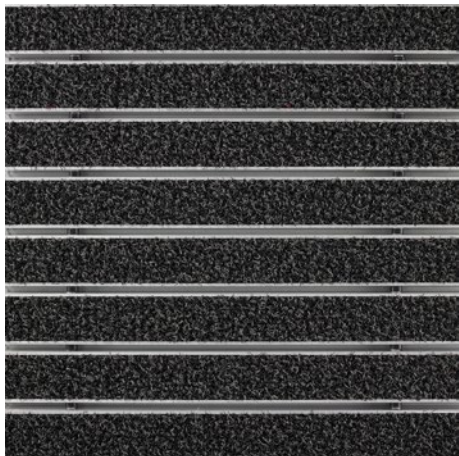

Anthracite

Warranty conditions are available at:  
[www.emco-bau.com/en/warranty-conditions/](http://www.emco-bau.com/en/warranty-conditions/)

Subject to technical modifications/Colours may deviate due to production processes

emco Bautechnik GmbH · Breslauer Straße 34-38 · D-49808 Lingen (Ems) ·  
Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
[bau@emco.de](mailto:bau@emco.de) · [www.emco-bau.com](http://www.emco-bau.com)

