

Model 517 PL Maximus Image B





Extra-wide options for all buildings with high demands in terms of resilience and a harmonious look. Tread surface can be printed with a single-colour image.

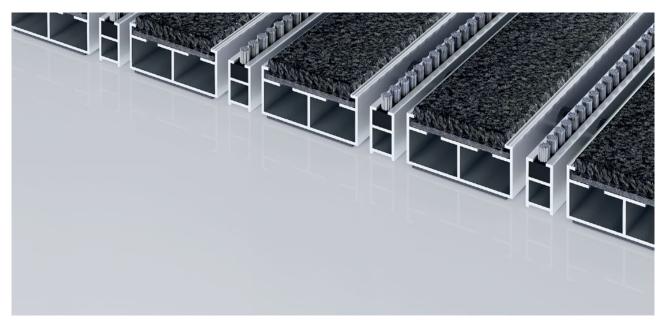





Indoor and outdoor (covered, Zone 1+2)

Description

Rollable and hard-wearing premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Suitable for single-colour printing of individual colour preferences. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.







Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Damp street dust, damp sand deposits, dust, etc.



5 years guarantee




class 33 (heavy commercial use)



emco DIPLOMAT Premium Large With Maximus Image insert and brush strip

Model 517 PL Maximus Image B

Colours

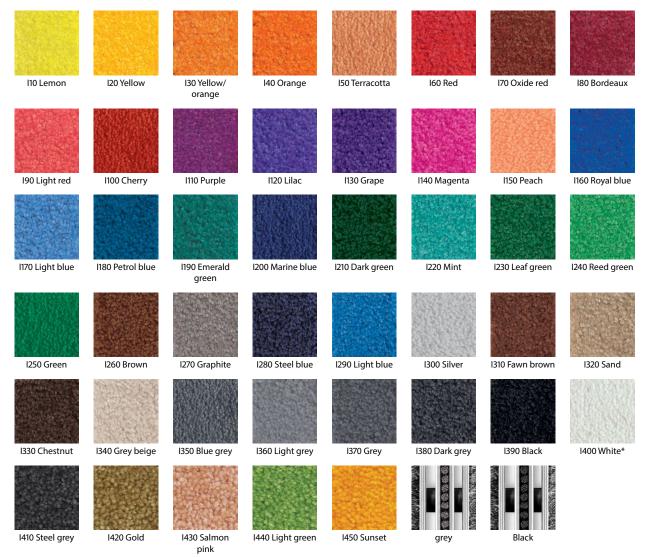



Model 517 PL Maximus Image B

Approx. height (mm)	17	
Roll-over and drive-over capability:	Prams	
	Sack-/hand truck	
	Wheelchairs	
Standard profile clearance approx. (mm)	5 mm, rubber spacers	
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	
Connection	Plastic-coated steel cable	
Max. width/profile length for individual section (mm):	3000	
Profile width (mm)	44	
Weight (kg/m²)	10,0	
Mat division as per factory standards	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat devisions/ splits possible at customer's request.	
Support chassis	Made using rigid aluminium with Premium sound absorbing insulation on the underside	
Support chassis colour	Aluminium as standard. Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel	
Tread surface	The Maximus Image insert is suitable for single-colour printing in a personally chosen colour. The additional profile increases the cleaning effect.	
Flammability	Insert with fire classification Bfl-s1 according to EN 13501.	
Pile material	100% PA 6.6 (polyamide)	
Use classification EN1307	class 33 (heavy commercial use)	

Accessories
emco installation frame 500: 500-20 AL Aluminium
emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)
emco ramp edge: A17 Aluminium
emco T-profile: T17
emco cover strip: C17 Chrome-nickel steel (V2A)
emco INOX®: LINEO 17 Chrome-nickel steel (V2A)
emco INOX®: QUADRO 17 Chrome-nickel steel (V2A)
emco dirt collection well: 5517AL Aluminium
emco dirt collection well: 5517CN Chrome-nickel steel (V2A)
emco dirt collection well: 5517AL Aluminium
emco dirt collection well: 5517CN Chrome-nickel steel (V2A)
Rubber underlay 3 mm: GU 3
Rubber underlay 5 mm: GU 5
Rubber underlay 1 mm: GU 1
Mat joining brackets: MV Supplied as standard with mats in several parts

Suitable for:
Retirement homes and Care-/Nursery Homes
medical practice
Offices and administrative buildings
Family home
Retail sector
Hotel
Kindergarten/Nursery
Apartment building
School
Sports hall

Insert certified to TÜV PROFICERT- product interior (Standard)		
French VOC regulation		
LEED v4 (outside North America)		
BREEAM Exemplary Level		
Belgian VOC regulation		
AgBB (Committee for Health-related Evaluation of Building Products)		
MVV TB Appendix 8, 9 / ABG		



emco DIPLOMAT Premium Large With Maximus Image insert and brush strip

Model 517 PL Maximus Image B

Construction site advice	
Dimensioning	
Measured using laser measuring device on site.	

Installation service

Fitting and installation service

Repairs

The product can be disposed of or recycled in an environmentally friendly way.

Warranty conditions are available at: www.emco-bau.com/en/warranty-conditions/

Subject to technical modifications

