
## Model 517 PSL Outdoor K



The extra-wide, long-lasting Premium entrance mat with the Outdoor insert for demonstrably thorough removal of coarse dirt. The additional profile provides extra cleaning. Ideal for buildings with extreme loading.

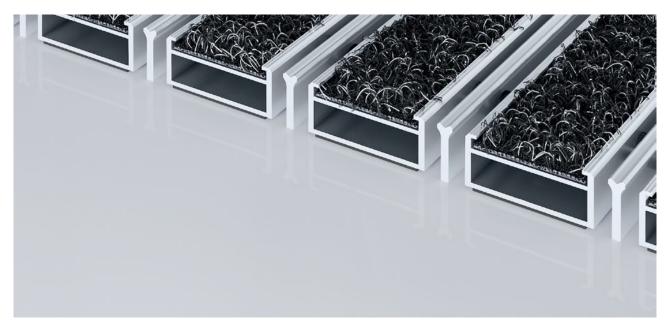

Indoor and outdoor (covered, Zone 1+2)

#### Description

Roll-up, extremely hard-wearing Premium entrance mat with extra-wide profiles and Performance insert for surface installation. Customisable width and depth without alignment profile. Available in any geometric shape.









Indoor and outdoor (covered, Zone

1+2)

hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles

Street dust,

5 years guarantee

Property suitable inlay 33



# emco MARSCHALL Premium Large With Outdoor insert and scraping edge

### Model 517 PSL Outdoor K

| Approx. height (mm)  | 17  |
|--|---|
| Roll-over and drive-over capability:                         | Prams<br>Sack-/hand truck<br>Wheelchairs  |
| Standard profile<br>clearance approx. (mm)                   | 5 mm, rubber spacers  |
| Automatic door systems                                       | Profile gaps, for revolving doors,<br>available in 3mm according to DIN EN<br>16005   |
| Connection   | Plastic-coated stainless steel cable  |
| Max. width/profile<br>length for individual<br>section (mm): | 3000  |
| Profile width (mm)   | 46.5  |
| Weight (kg/m²)   | 12,9  |
| Mat division as per<br>factory standards                     | From a profile length of 3000 mm<br>or a maximum mat weight of 30 kg.<br>For profile lengths above 2300 mm, a<br>surcharge is applicable . Mat devisions/<br>splits possible at customer's request. |
| Support chassis  | Reinforced support chassis made using<br>rigid aluminium with sound absorbing<br>insulation on the underside  |
| Support chassis colour                                       | Standard natural anodized Anodised<br>colours for an additional charge: EV3<br>gold, C33 mid-bronze, C35 black or C31<br>stainless steel  |
| Tread surface  | The weather-resistant Outdoor insert<br>for noticeably thorough removal of<br>coarse dirt. The additional profile<br>increases the cleaning power.  |
| Flammability   | Insert with fire classification Cfl-s1 according to EN 13501.   |
| Pile material  | 100% PA 6 (polyamide)   |
| Use classification<br>EN1307                                 | Property suitable inlay 33  |

#### Accessories

| emco installation frame 500: 500-20 AL Aluminium                         |
|--|
| emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)         |
| emco ramp edge: A17 Aluminium  |
| emco T-profile: T17  |
| emco cover strip: C17 Chrome-nickel steel (V2A)                          |
| emco INOX®: LINEO 17 Chrome-nickel steel (V2A)                           |
| emco INOX®: QUADRO 17 Chrome-nickel steel (V2A)                          |
| emco dirt collection well: 5517AL Aluminium                              |
| emco dirt collection well: 5517CN Chrome-nickel steel (V2A)              |
| Rubber underlay 1 mm: GU 1   |
| Rubber underlay 3 mm: GU 3   |
| Rubber underlay 5 mm: GU 5   |
| Mat joining brackets: MV Supplied as standard with mats in several parts |
|  |

### Suitable for:

Retirement homes and Care-/Nursery Homes

Arena

medical practice

Train station

DIY store

Offices and administrative buildings

Family home

Shopping centre

Retail sector

University / Higher education institution

airport

Hotel

Industry

Kindergarten/Nursery

Warehouse

Apartment building

Trade fair

School

Sports hall



## emco MARSCHALL Premium Large With Outdoor insert and scraping edge

## Model 517 PSL Outdoor K

Service and services

Construction site advice

Dimensioning

Measured using laser measuring device on site.

Installation service

Fitting and installation service

Repairs

The product can be disposed of or recycled in an environmentally friendly way.



# emco MARSCHALL Premium Large With Outdoor insert and scraping edge

### Model 517 PSL Outdoor K

Colours



Anthracite



Brown



Red

Warranty conditions are available at: www.emco-bau.com/en/warranty-conditions/

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 · 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com

