

Model 517 SLRK





The extra-wide original entrance mat with the effective, coarse-fibre rib insert is exceptionally abrasion resistant and offers maximum dimensional stability. Particularly ideal for collecting fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to extreme footfall.

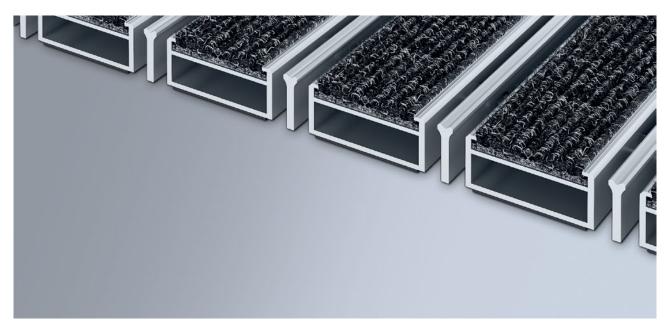



Description

Roll-up, extremely hard-wearing Original entrance mat with extra-wide profiles and Standard insert for surface installation. Customisable width and depth without alignment profile. Available in any geometric shape.





Indoor and outdoor (covered, Zone 1+2)

Street dust, 4 year warhair, sand, ash, ranty textile fibres, small leaves

and twigs, etc.



Model 517 SLRK

Approx. height (mm)	17	
Roll-over and drive-over capability:	Prams Sack-/hand truck Wheelchairs	
Standard profile clearance approx. (mm)	5 mm, rubber spacers	
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	
Connection	Plastic-coated steel cable	
Max. width/profile length for individual section (mm):	3000	
Profile width (mm)	46.5	
Depth/walking depth for individual section (mm):	800	
Weight (kg/m²)	12,3	
Mat division as per factory standards	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat devisions/ splits possible at customer's request.	
Support chassis	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside	
Support chassis colour	Aluminium as standard. Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel	
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips, also with scraper bars mounted between the profiles.	
Flammability	Insert available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.	
Pile material	100% PP (polypropylene)	
Colour fastness to artificial light ISO 105- B02	good 6	
Colour fastness to rubbing ISO 105 X12	good 4	
Colour fastness to water ISO 105 E01	good 5	

Accessories	
emco installation frame 500: 500-20 AL Alumir	nium
emco installation frame 500: 500-20 CN Chrom	ne-nickel steel (V2A)
emco ramp edge: A17 Aluminium	
emco T-profile: T17	
emco cover strip: C17 Chrome-nickel steel (V2/	۹)
emco INOX®: LINEO 17 Chrome-nickel steel (V2	2A)
emco INOX®: QUADRO 17 Chrome-nickel steel	(V2A)
emco dirt collection well: 5517AL Aluminium	
emco dirt collection well: 5517CN Chrome-nick	kel steel (V2A)
emco dirt collection well: 5517AL Aluminium	
emco dirt collection well: 5517CN Chrome-nick	kel steel (V2A)
Rubber underlay 3 mm: GU 3	
Rubber underlay 5 mm: GU 5	
Rubber underlay 1 mm: GU 1	
Mat joining brackets: MV Supplied as standarc parts	d with mats in severa
Suitable for:	
Retirement homes and Care-/Nursery Homes	
Arena	
medical practice	
Train station	
DIY store	
Offices and administrative buildings	
Family home	
Shopping centre	
Retail sector	
University / Higher education institution	
airport	
Hotel	
Industry	
Kindergarten/Nursery	
Warehouse	
Apartment building	
Trade fair	
School	
Sports hall	



Model 517 SLRK

Insert certified to TÜV PROFiCERT- product interior (Standard)

French VOC regulation

LEED v4 (outside North America)

BREEAM Exemplary Level

Belgian VOC regulation

AgBB (Committee for Health-related Evaluation of Building Products)

MVV TB Appendix 8, 9 / ABG

Service and services

Construction site advice

Dimensioning

Measured using laser measuring device on site.

Installation service

Fitting and installation service

Repairs

The product can be disposed of or recycled in an environmentally friendly way.



Model 517 SLRK

Colours



Light grey no. 220



Red no. 305



Sand no. 430

Warranty conditions are available at: www.emco-bau.com/en/warranty-conditions/

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 · 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com



Anthracite no. 200



Brown no. 485

