

#### **Model 522 PL Outdoor B**





The extra-wide, long-lasting Premium entrance mat with the Outdoor insert for demonstrably thorough removal of coarse dirt. The additional profile provides extra cleaning. Ideal for buildings with normal to heavy loading.

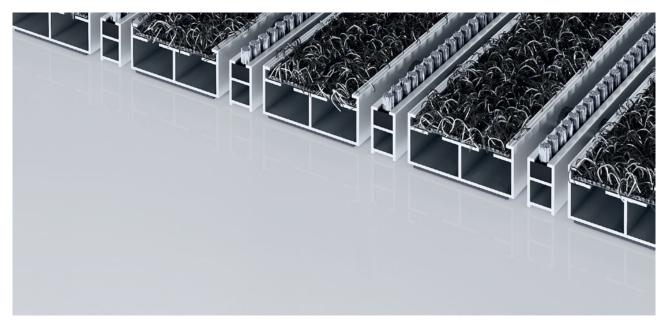





Indoor and outdoor (covered, Zone 1+2)

#### Description

Rollable and hard-wearing premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.







hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



rantee



class 33 (heavy commercial

use)



# **Model 522 PL Outdoor B**

Approx. height (mm)	22	
Roll-over and drive-over capability:	Prams Sack-/hand truck Wheelchairs	
Standard profile clearance approx. (mm)	5 mm, rubber spacers	
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	
Connection	Plastic-coated stainless steel cable	
Max. width/profile length for individual section (mm):	3000	
Profile width (mm)	44	
Depth/walking depth for individual section (mm):	1500	
Weight (kg/m²)	10,3	
Mat division as per factory standards	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat devisions/ splits possible at customer's request.	
Support chassis	Made using rigid aluminium with Premium sound absorbing insulation on the underside	
Support chassis colour	Aluminium as standard. Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C3 stainless steel	
Tread surface	The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile increases the cleaning power.	
Flammability	Insert with fire classification Cfl-s1 according to EN 13501.	
Pile material	100% PA 6 (polyamide)	
Use classification EN1307	class 33 (heavy commercial use)	

Accessories	
emco installation frame 500: 500-25 AL Aluminium	
emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)	
emco LUMINA: LUMINA Aluminium	
emco LUMINA: LUMINA + LED Aluminium	
emco LUMINA: LUMINA VIA Aluminium	
emco ramp edge: A17 Aluminium	
emco T-profile: T22	
emco cover strip: C22 Chrome-nickel steel (V2A)	
emco INOX®: LINEO 22 Chrome-nickel steel (V2A)	
emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)	
emco dirt collection well: 5522AL Aluminium	
emco dirt collection well: 5522CN Chrome-nickel steel (V2A)	
emco dirt collection well: 5522AL Aluminium	
emco dirt collection well: 5522CN Chrome-nickel steel (V2A)	
Rubber underlay 3 mm: GU 3	
Rubber underlay 5 mm: GU 5	
Rubber underlay 1 mm: GU 1	
Mat joining brackets: MV Supplied as standard with mats in several parts	

Suitable for:
Retirement homes and Care-/Nursery Homes
medical practice
Offices and administrative buildings
Family home
Retail sector
Hotel
Kindergarten/Nursery
Apartment building
School
Sports hall



## **Model 522 PL Outdoor B**

Service and services	
Construction site advice	
Dimensioning	
Measured using laser measuring device on site.	

Installation service

Fitting and installation service


Repairs

The product can be disposed of or recycled in an environmentally friendly way.





## **Model 522 PL Outdoor B**


#### Colours















Brown

