
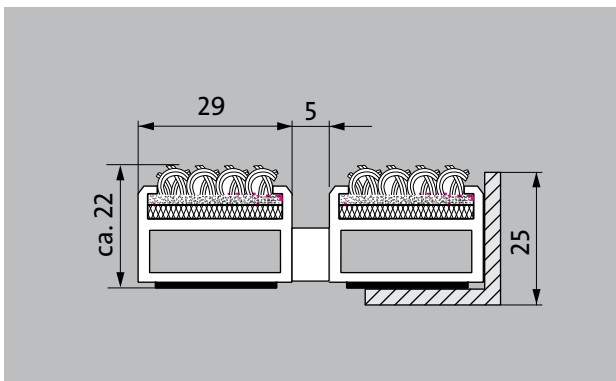


Model 522 RDR

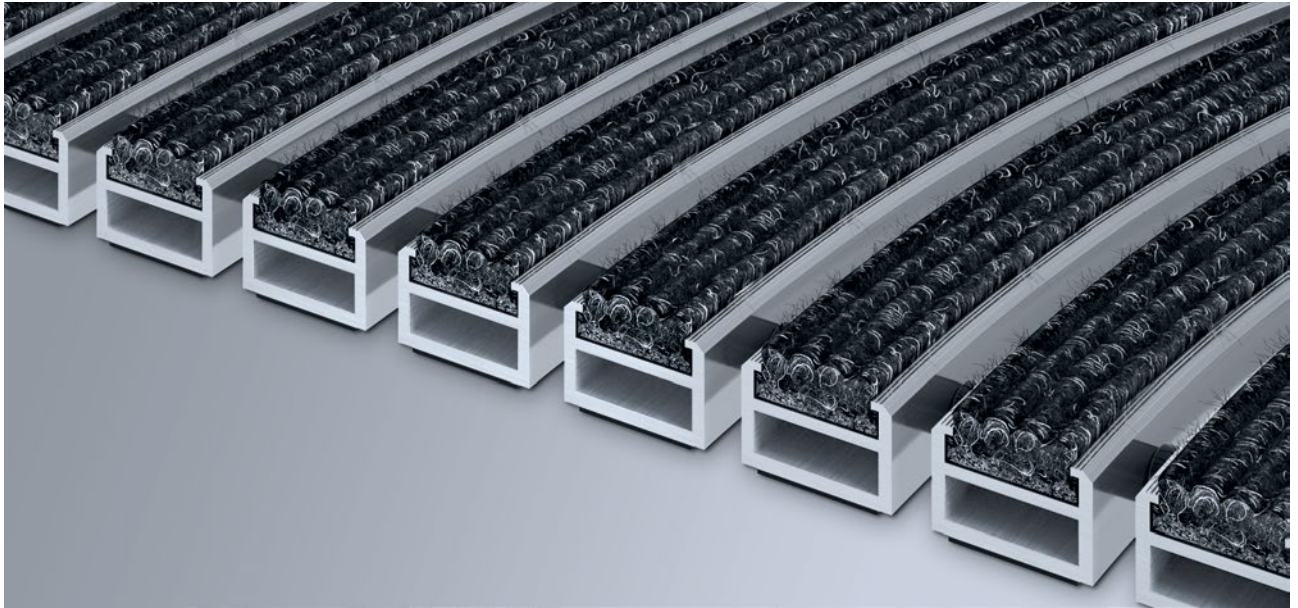

The extravagant one for architecturally sophisticated properties. Ideal design for all entrances with round structural shapes. Ideal for picking up fine dirt.

1 **2** **3** Indoor and outdoor
(covered, Zone 1+2)

Description

Hard-wearing, radial curved entrance mat. Installation frame and entrance mat as a single unit, for laying on the floor. Can be rolled over and also driven over by fork lifts and goods vehicles. Mats produced to fit width and walking depth specifications perfectly, without the need for alignment profiles. Smallest bending radius 800 mm.



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Extremely durable



Flammability in accordance with European standard Cfl-s1. (Tested by the Textiles & Flooring Institute GmbH).



Model 522 RDR

Approx. height (mm)	22
Roll-over and drive-over capability:	Wheelchairs Prams Light shopping trolleys hand trolleys Cars pallet trucks
Standard profile clearance approx. (mm)	5 mm, rubber spacers
Automatic door systems	Profile gaps, for revolving doors, available in 3mm according to DIN EN 16005
Connection	Threaded stainless steel rod
Max. width/profile length for individual section (mm):	3000
Profile width (mm)	29
Weight (kg/m²)	16,8
Mat division as per factory standards	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat deviations/ splits possible at customer's request.
Support chassis	Made using rigid aluminium with sound absorbing insulation on the underside

Tread surface	Recessed, robust, weather-proof, ribbed carpet strips.
Flammability	Insert for Light Grey and Anthracite ribbed carpet colours available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
Colour fastness to artificial light ISO 105-B02	good 6
Colour fastness to rubbing ISO 105 X12	good 4
Colour fastness to water ISO 105 E01	good 5

Accessories
emco installation frame 500: 500-25 AL Aluminium
emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)
emco T-profile: T22
Mat joining brackets: MV Supplied as standard with mats in several parts

Service and services
Construction site advice
Measured using laser measuring device on site.
Fitting and installation service
The product can be disposed of or recycled in an environmentally friendly way.

Model 522 RDR

Colours



Light grey no. 220




Anthracite no. 200



Red no. 305



Brown no. 485

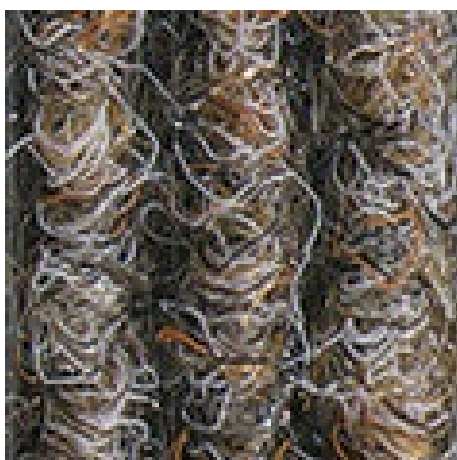

Sand no. 430

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

