
Model 522 SLRB



The extra-wide original entrance mat with the effective, coarse-fibre rib insert is exceptionally abrasion resistant and offers maximum dimensional stability. Particularly ideal for collecting fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to extreme footfall.





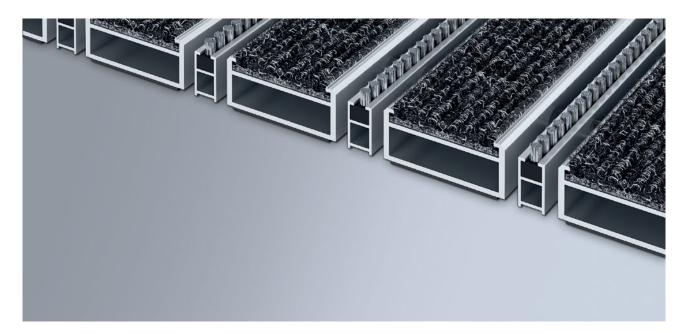

Indoor and outdoor (covered, Zone 1+2)

Description

Roll-up, extremely hard-wearing Original entrance mat with extra-wide profiles and Standard insert for surface installation. Customisable width and depth without alignment profile. Available in any geometric shape.



Indoor and outdoor (covered, Zone



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



★ 4 ★ Year Guarantee

4 year warranty



Model 522 SLRB

Approx. height (mm)	22	
Roll-over and drive-over capability:	Prams	
	Sack-/hand truck	
	Wheelchairs	
Standard profile clearance approx. (mm)	5 mm, rubber spacers	
Automatic door systems	Profile gaps, for revolving doors, available in 3mm according to DIN EN 16005	
Connection	Plastic-coated steel cable	
Max. width/profile length for individual section (mm):	3000	
Profile width (mm)	46.5	
Weight (kg/m²)	13,4	
Mat division as per factory standards	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat devisions/ splits possible at customer's request.	
Support chassis	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside	
Support chassis colour	Standard natural anodized Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel	
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips, also with brush strips mounted between the profiles.	
Flammability	Insert available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.	
Pile material	100% PP (polypropylene)	
Colour fastness to artificial light ISO 105- B02	good 6	
Colour fastness to rubbing ISO 105 X12	good 4	
Colour fastness to water ISO 105 E01	good 5	

Accessories	
emco installation frame 500: 500-25 AL Aluminium	
emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)	
emco ramp edge: A17 Aluminium	
emco T-profile: T22	
emco cover strip: C22 Chrome-nickel steel (V2A)	
emco INOX®: LINEO 22 Chrome-nickel steel (V2A)	
emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)	
emco dirt collection well: 5522AL Aluminium	
emco dirt collection well: 5522CN Chrome-nickel steel (V2A)	
Rubber underlay 1 mm: GU 1	
Rubber underlay 3 mm: GU 3	
Rubber underlay 5 mm: GU 5	
Mat joining brackets: MV Supplied as standard with mats in several parts	

Suitable for:
Retirement homes and Care-/Nursery Homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Warehouse
Apartment building
Trade fair
School
Sports hall



emco MARSCHALL Original Large With ribbed carpet insert and brush strip

Model 522 SLRB

Service and services	Installation service
Construction site advice	Fitting and installation serv
Dimensioning	Repairs
Measured using laser measuring device on site.	The product can be dispose friendly way.

sed of or recycled in an environmentally



Model 522 SLRB

Colours



Light grey no. 220



Red no. 305






Anthracite no. 200



Brown no. 48






emco MARSCHALL Original Large With ribbed carpet insert and brush strip

Model 522 SLRB

Colours



Black

Warranty conditions are available at: www.emco-bau.com/en/warranty-conditions/



