
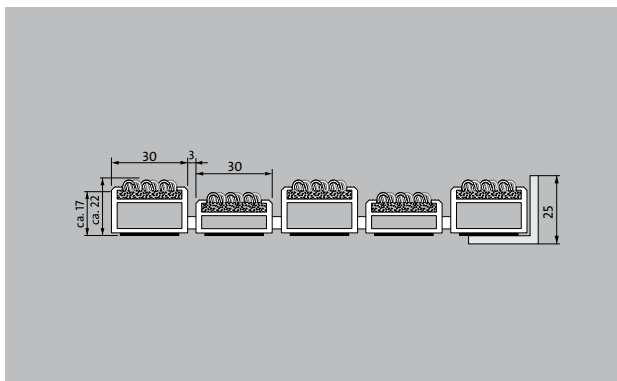


## Model 522 TLS PS Outdoor

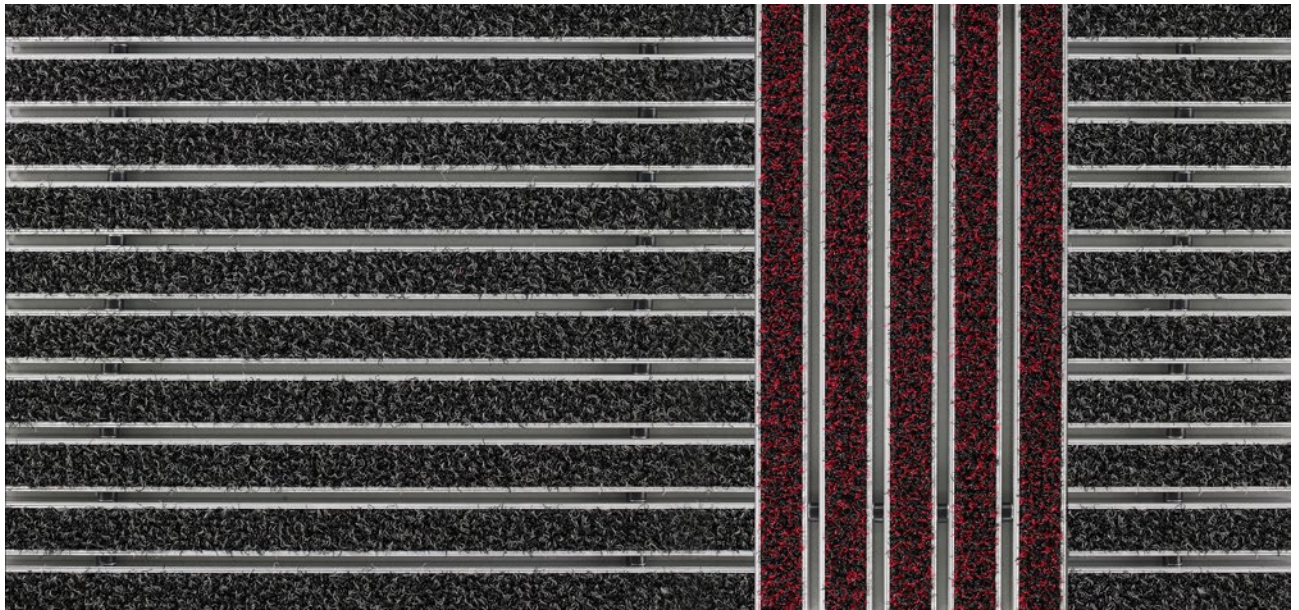

The emco entrance mat as a guidance system for the visually impaired

- 1** **2** **3** Indoor and covered outdoor areas (zones 1 and 2)

### Description

The emco guidance system for the visually impaired is tactile and comes in high-contrast colours with different profile heights and profiles that run longitudinally to the direction of traffic, enabling blind and visually impaired people to find doors, stairs, lifts etc. as well as providing orientation in larger areas. Ideal guidance with cleaning effect through the entrance to the building. The guidance system also draws attention to obstacles and possible dangers. The floor guidance system can also facilitate orientation for people with no visual impairment. Optionally available with textured ground surface indicators and painted aluminium profiles.



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles




The emco entrance mat as a guidance system for the visually impaired



Extremely durable



5 years guarantee

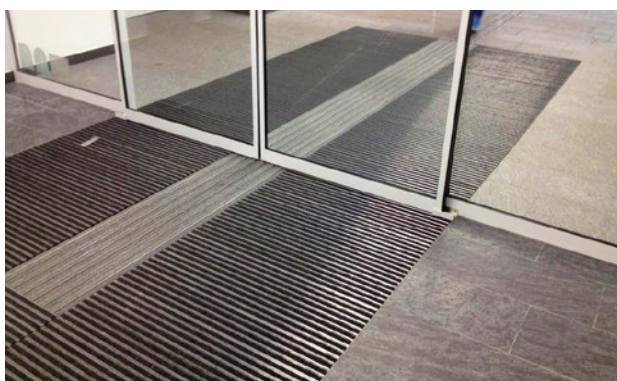

## Model 522 TLS PS Outdoor

Approx. height (mm)	22
<b>Roll-over and drive-over capability:</b>	Prams
	Sack-/hand truck
	Wheelchairs
	Light shopping trolleys
	hand trolleys
	pallet trucks
	Electric lift truck
<b>Standard profile clearance approx. (mm)</b>	Cars
	3 mm, rubber spacers
<b>Connection</b>	With threaded rod
<b>Max. width/profile length for individual section (mm):</b>	3000
<b>available in the following widths (mm)</b>	166, 232, 298, 364, 430, 496, 562, 628
<b>Weight (kg/m<sup>2</sup>)</b>	9,6
<b>Mat division as per factory standards</b>	From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat deviations/splits possible at customer's request.
<b>Support chassis</b>	made of rigid aluminium with sound insulation underlay. In the area of the tactile guidance system, the profiles are laid alternately in two heights.
<b>Tread surface</b>	The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt.
<b>Pile material</b>	100% PA 6 (polyamide)
<b>Colour fastness to artificial light ISO 105-B02</b>	excellent 7
<b>Colour fastness to rubbing ISO 105 X12</b>	good 4-5
<b>Colour fastness to water ISO 105 E01</b>	good 4-5

### Accessories

emco installation frame 500: 500-25 AL Aluminium

emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)

### Suitable for:

Retirement homes and Care-/Nursery Homes

Arena

medical practice

Train station

DIY store

Offices and administrative buildings

Family home

Shopping centre

Retail sector

University / Higher education institution

airport

Hotel

Industry

Kindergarten/Nursery

Clinic/Hospital

Warehouse

Apartment building

Trade fair

School

Sports hall

Supermarket

### Service and services

Construction site advice

Measured using laser measuring device on site.

Fitting and installation service

The product can be disposed of or recycled in an environmentally friendly way.



## **Model 522 TLS PS Outdoor**


### **Colours**



Anthracite



Brown

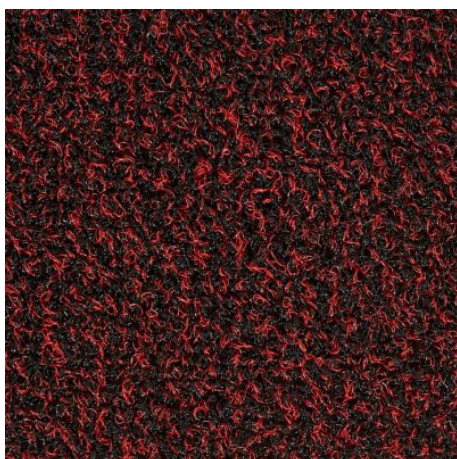

Red

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · [www.emco-bau.com](http://www.emco-bau.com)

