


Model 5512AL

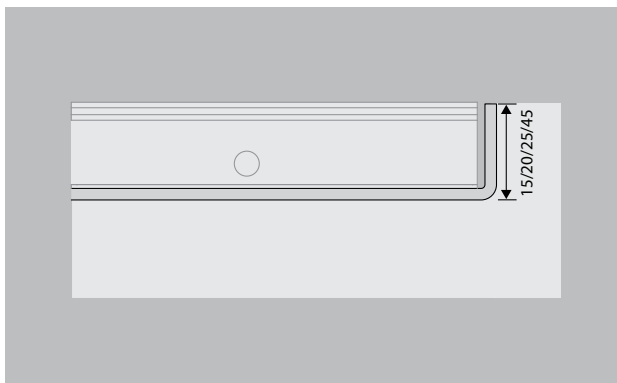

emco dirt collection wells are required to counter the increased dirt levels in heavily frequented entrance areas. When combined with the matching emco entrance mat, they form a closed system which reduces dirt transference and protects adjacent indoor floor coverings.

Description

Dirt collection wells developed for emco DIPLOMAT and emco MARSCHALL entrance mats for increased dirt uptake.



Outside
(Zone 1)



Indoor and
outdoor (co-
vered, Zone
1+2)



Street dust,
hair, sand,
ash, textile
fibres, small
leaves and
twigs, loose
chippings,
coarse sand,
small gravel
particles



Damp street
dust, damp
sand deposits,
dust, etc.

Model 5512AL

Weight (kg/m²)	8,5
Suitable for	DIPLOMAT 12 MARSCHALL 12 Also available in large variants.
Approx. material thickness (mm)	3,0
Structure	An dirt-collection well unit can consist of either a single-piece well, or multiple wells with different widths and depths that are assembled consecutively in a modular fashion. From a visual and functional perspective, the entrance mat is manufactured in the same size with an edging frame.

Material	Aluminium, bonded and waterproof, interior completely smooth for easy cleaning. Also available in stainless steel (V2A) on request.
Additional data	The support for the entrance mat is integrated in the well.
Larger dimensions	Multiple well units are placed next to each other on site to make a single system.
Drainage system	This type of well does not have a drainage system
Well overall height	15mm
Max. well width, one piece (mm)	2800
Max. well depth, one piece (mm)	1300

Subject to technical modifications