


Model 775

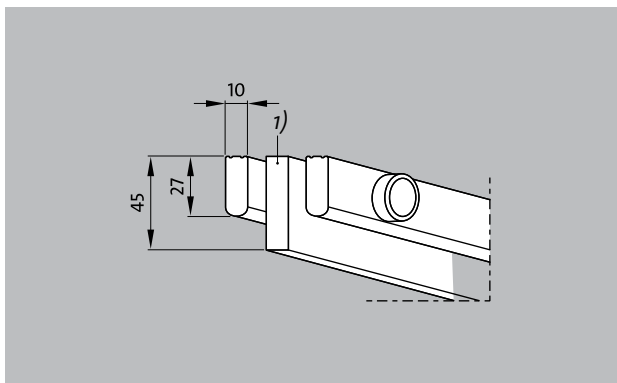

Description

Rigid floor grating. Safe, stable and sound workmanship. Its high specific weight prevents the floor grating from floating in water. Special shapes that are circular or with angles available.

Colours



White - similar
to RAL 9010

Model 775

Material	<p>High quality, extremely hard-wearing plastic, with UV absorber.</p> <p>Entirely corrosion-free and resistant to chlorine, sea water and spa water.</p> <p>No need for any metal parts; surface enclosed on all sides to provide maximum hygiene.</p>
Support chassis	<p>Full profile (27 x 10 mm)</p> <p>At 250 mm intervals, with integrated GFK support profiles (full profile, 45 x 14 mm).</p>
Finish	Flat upper profile surface with safety profile seal (SPS).
Profile spacing:	< 8 mm in accordance with DIN EN 13451-1 and DIN EN 16582-1 (to prevent areas where fingers could become trapped)
Height (mm)	45
Connection	Fibre-glass reinforced polyester pipes as connection elements
Slip resistance	Non-slip in accordance with DIN 51097, classification C - tested by the „Institut der Säurefliesner-Vereinigung“ (Säurefliesner consortium)

Variable grating width (mm)	<1000
Comment	Self-supporting (GFK profile)
Special shapes	yes
Water drainage	yes
Usage area	<p>Public shower areas</p> <p>Barrier-free shower areas</p> <p>Footbaths</p>
Dimensions	Produced to fit width and depth perfectly without the need for alignment profiles
Properties	<p>Aesthetically pleasing</p> <p>Good water drainage</p> <p>Corrosion-free</p>

Service and services
Dimensioning
Installation service
Repairs

Subject to technical modifications