


# Model CARE SE



Full loop for effective dirt removal

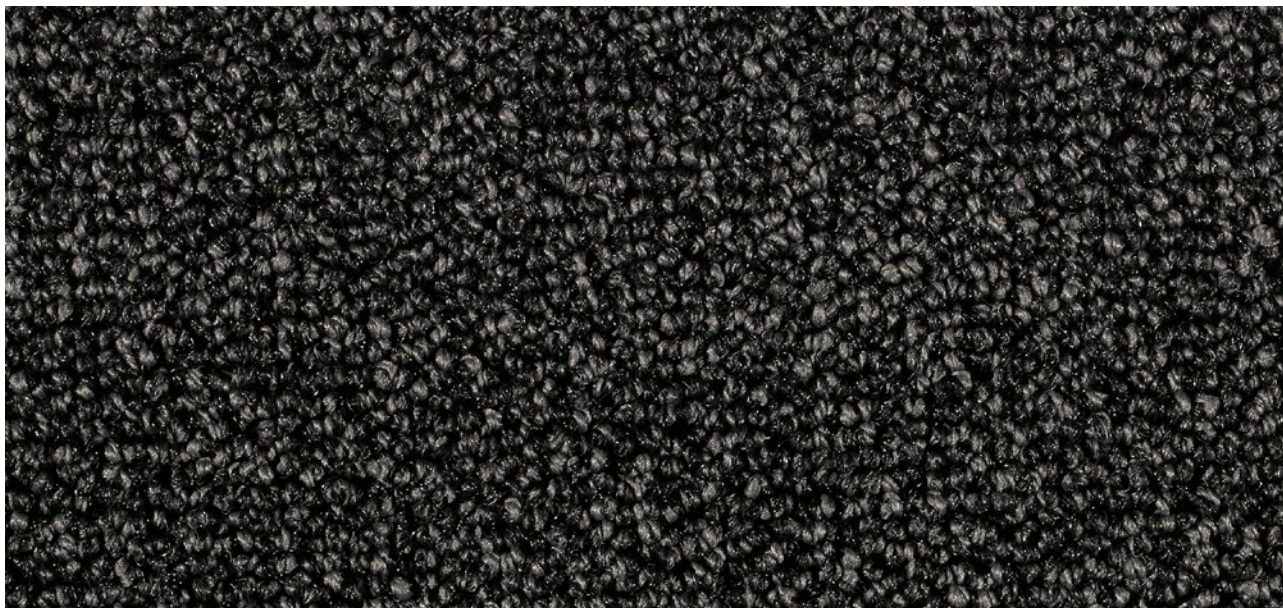

Indoor areas (zone 3)

### Description

High-quality look for effective, long-lasting protection of all high-grade floor coverings behind the clean-off zone.



Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Cfl-s1



High



Property suitable inlay 33

# Model CARE SE

<b>Construction</b>	Tufting velour 5/32"
<b>Pile above substrate</b>	100% polyamide
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	Synthetic latex
<b>Pile weight / fibre weight</b>	1.000
<b>Total weight (g/m<sup>2</sup>)</b>	2.200
<b>Overall height (mm)</b>	7,2
<b>Tuft density/m<sup>2</sup></b>	78.120
<b>Slip resistance</b>	DS (EN 13893)
<b>Certificates</b>	CE conformity EN 14041 (rolls only)


<b>Supplied as rolls</b>	400 cm wide (no border)
<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	This material must generally be laid with a suitable adhesive across its whole surface area. The manufacturer's guidelines should be followed when working with the adhesive.
<b>Cleaning</b>	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
<b>Brand</b>	emco

# Model CARE SE

### Colours



47.01 anthracite

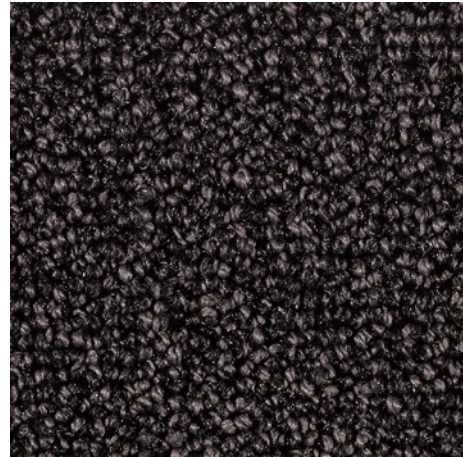

47.02 grey



47.03 brown



47.04 beige

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:  
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@  
emco.de · [www.emco-bau.com](http://www.emco-bau.com)

**emco**