

Model CONFORM SE



Colour-harmonised unit



Indoor areas (zone 3)

Description

Exclusive velour, recycled ECONYL yarn, tailored to suit appearance of wood and designer floors, low-flammability version: fire classification Cfl-s1



Anti-static



Castor-resis-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Cfl-s1



Luxurious



Property sui-
table inlay 33

Model CONFORM SE


Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide ECONYL
Substrate material	Polyester fleece
Backing material	Synthetic latex
Pile weight / fibre weight	1.200
Total weight (g/m²)	2.400
Overall height (mm)	8,5
Tuft density/m²	132.280
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls SE/Bfl-s1	400 cm wide (no border)
Product characteristics	Soiling and moisture absorption
Laying	This material must generally be laid with a suitable adhesive across its whole surface area. The manufacturer's guidelines should be followed when working with the adhesive.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).

Brand	emco
--------------	------


Suitable for:
Retirement homes and Care-/Nursery Homes
Arena
medical practice
Train station
Offices and administrative buildings
Family home
University / Higher education institution
airport
Hotel
Kindergarten/Nursery
Apartment building
Trade fair
School
Sports hall

Model CONFORM SE

Colours

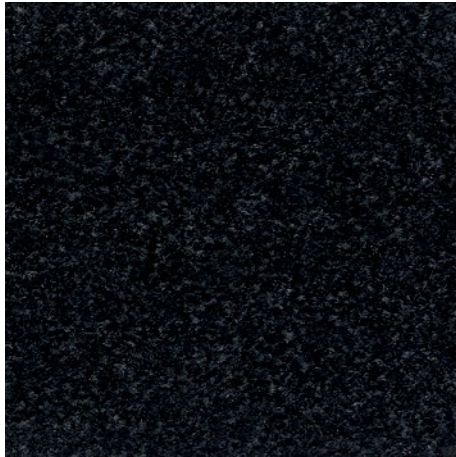

76.01 Anthracite

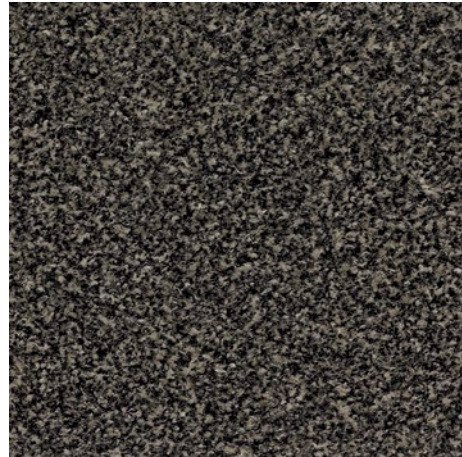

76.02 Beige



Mocha 76.03



76.04 Brown



76.10 grey

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com

