

## Model CONFORM



Colour-harmonised unit



Indoor areas (zone 3)

### Description

Exclusive velour, recycled ECONYL yarn, tailored to suit appearance of wood and designer floors.



Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Cfl-s1



Luxurious



Property suitable inlay 33

# Model CONFORM

<b>Construction</b>	Tufting-Velours 1/8"
<b>Pile above substrate</b>	100% polyamide ECONYL
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	Heavy coating
<b>Pile weight / fibre weight</b>	1.200
<b>Total weight (g/m<sup>2</sup>)</b>	3.710
<b>Overall height (mm)</b>	9
<b>Tuft density/m<sup>2</sup></b>	132.280
<b>Slip resistance</b>	DS (EN 13893)
<b>Certificates</b>	CE conformity EN 14041 (rolls only)
<b>Supplied as rolls</b>	130 cm wide (incl. border) 200 cm wide (incl. border)
<b>Supplied as mats</b>	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border)
<b>Supplied as stair mat</b>	25 x 65 cm (with non-slip nonwoven fabric and merrow border)
<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.


<b>Cleaning</b>	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
<b>Brand</b>	emco

<b>Suitable for:</b>
Retirement homes and Care-/Nursery Homes
Arena
medical practice
Train station
Offices and administrative buildings
Family home
University / Higher education institution
airport
Hotel
Kindergarten/Nursery
Apartment building
Trade fair
School
Sports hall




## Model CONFORM

### Colours

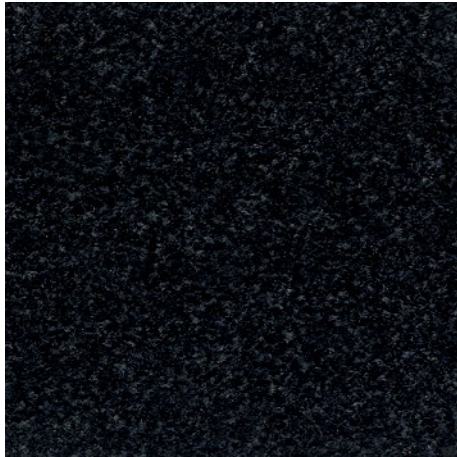

76.01 Anthracite

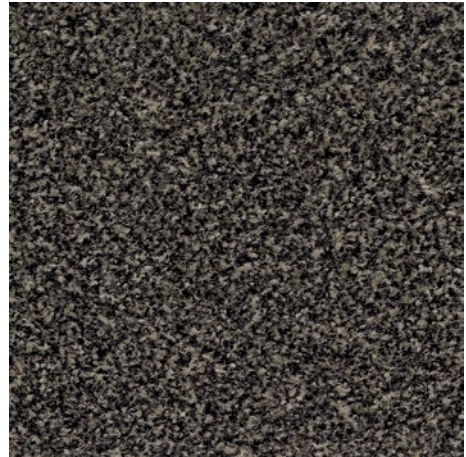

76.02 Beige



Mocha 76.03



76.04 Brown



76.10 grey

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:  
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@  
emco.de · [www.emco-bau.com](http://www.emco-bau.com)

