

Model CONFORM



Colour-harmonised unit



Indoor areas (zone 3)

Description

Exclusive velour, recycled ECONYL yarn, tailored to suit appearance of wood and designer floors.



Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Cfl-s1



Luxurious



Property suitable inlay 33

Model CONFORM


Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide ECONYL
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	1.200
Total weight (g/m²)	3.710
Overall height (mm)	9
Tuft density/m²	132.280
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	130 cm wide (incl. border) 200 cm wide (incl. border)
Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border)
Supplied as stair mat	25 x 65 cm (with non-slip nonwoven fabric and merrow border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.

Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco


Suitable for:
Retirement homes and Care-/Nursery Homes
Arena
medical practice
Train station
Offices and administrative buildings
Family home
University / Higher education institution
airport
Hotel
Kindergarten/Nursery
Apartment building
Trade fair
School
Sports hall

Model CONFORM

Colours

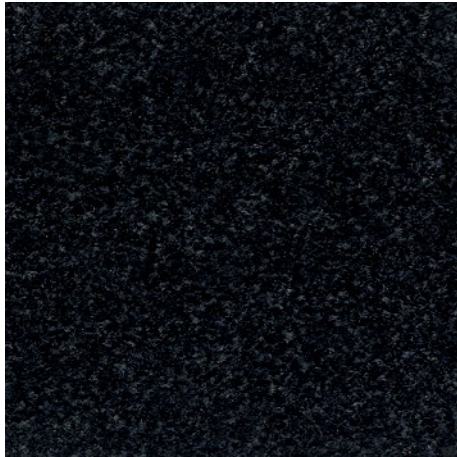

76.01 Anthracite

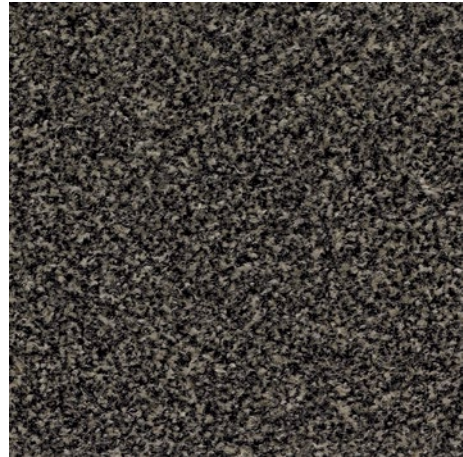

76.02 Beige



Mocha 76.03



76.04 Brown



76.10 grey

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com

