


# Carpet mats


## Model Classic

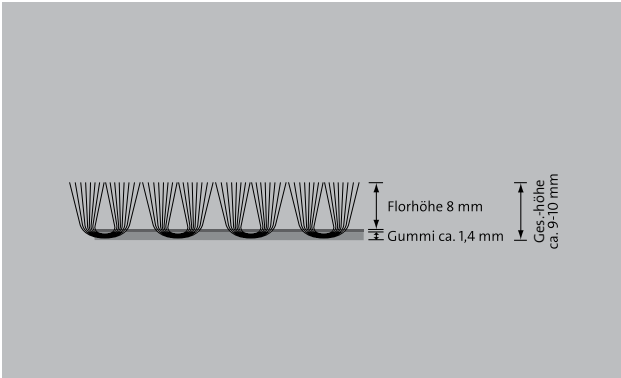

### Description

Robust carpet mat that picks up dirt and absorbs moisture in 3 standard colours. Protects floors and floor coverings. Reduces cleaning costs. Versatile, can be used in industrial and administration areas.

### Colours

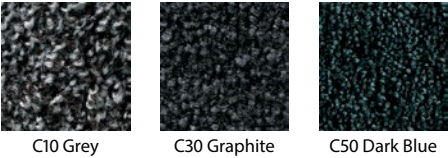

## Carpet mats

# Model Classic

<b>Backing material</b>	Nitrile rubber coating, thickness approx. 1.4 mm, smooth or dimpled
<b>Border width</b>	Approx. 20 mm
<b>Pile height</b>	Approx. 8 - mm
<b>Pile material</b>	High twist nylon (100% polyamide 6), effective pile weight 650 g/m <sup>2</sup>
<b>Height</b>	Approx. 10 - mm
<b>Total weight (g/m<sup>2</sup>)</b>	2500
<b>Dimension tolerance in %</b>	+/- 3 %
<b>Tread border label</b>	By request
<b>Water absorption</b>	Approx. 3 to 4 litres per m <sup>2</sup>
<b>Max. washing temperature °C</b>	80
<b>Oil resistant (nitrile rubber back)</b>	Extremely good

<b>Electrostatic behaviour</b>	Extremely low electrostatic charging, volume resistance 2.2 x 10 <sup>11</sup> Ohms, in acc. with DIN 54345
<b>Resistance to fire</b>	Available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
<b>Warranty</b>	Statutory warranty period 2 years, subject to proper care, cleaning and storage.
<b>Standard width (cm)</b>	85 115 150 200 Special dimensions possible, up to 200 x 500 cm

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · www.emco-bau.com

