
Model INNOVA





An innovative, high-quality clean-off solution that can be adapted perfectly to suit all requirements relating to design and technology, and consistently reduces dirt. It not only looks great, but also improves features such as room acoustics.

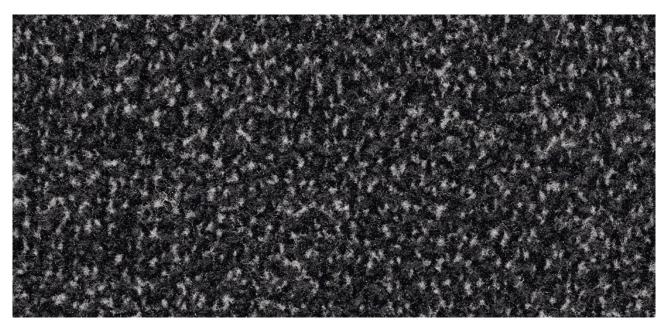

Description

An innovative, high-quality clean-off solution that can be adapted perfectly to suit all requirements relating to design and technology, and consistently reduces dirt. It not only looks great, but also improves features such as room acoustics.









Anti-static

Castor-resistant

Suitable for stairs

DS (EN 13893) Resistant strength

C_{fl}-s1

Cfl-s1

High

class 33 (heavy commercial use)



Model INNOVA


(Tetra).

Construction	Tufting velour 5/32"	Brand emco	
		enco	
Pile above substrate	100% polyamide		
Substrate material	Polyester fleece	Suitable for:	
Backing material	Heavy coating	Retirement homes and Care-/Nursery Homes	
Pile weight / fibre weight	885	Arena medical practice	
Total weight (g/m²)	3.430	Train station	
Overall height (mm)	8	DIY store	
Tuft density/m ²	75.590	Offices and administrative buildings	
Slip resistance	DS (EN 13893)	Family home	
Certificates	CE conformity EN 14041 (rolls only)	Shopping centre	
Supplied as rolls	100 and wide (in all header)	Retail sector	
	100 cm wide (incl. border)		
	150 cm wide (incl. border)	University / Higher education institution	
	200 cm wide (incl. border)	airport	
Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border)	Hotel	
		Industry	
		Kindergarten/Nursery	
	130 x 200 cm (incl. border)	Clinic/Hospital	
	200 x 300 cm (incl. border)	Warehouse	
Product characteristics	Soiling and moisture absorption	Apartment building	
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.	Trade fair	
		School	
		Sports hall	
		Supermarket	
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra)		




Model INNOVA

Colours




36.01 black



36.03 grey



36.10 slate



36.02 anthracite



36.08 mocha

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems) · Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email: bau@emco.de · www.emco-bau.com

