



Model Image ECO Style

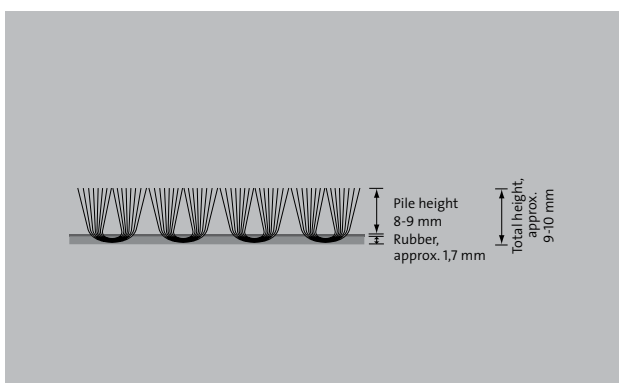

Description

The emco Image ECO Style for individual special shapes is made of the high-quality, sustainable ECONYL® brand fibre and is characterised by high dirt and moisture absorption. Thanks to its individual printability, emco Image ECO Style also has an excellent advertising effect.

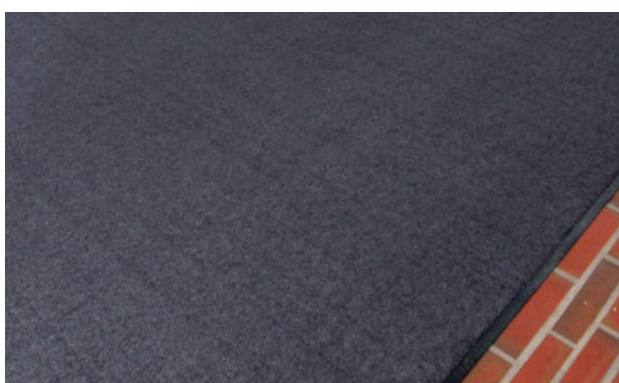

Model Image ECO Style

Colours



I10 Lemon



I20 Yellow



I30 Yellow/
orange



I40 Orange




I50 Terracotta



I60 Red




I70 Oxide red




I80 Bordeaux



I90 Light red



I100 Cherry



I110 Purple



I120 Lilac




I130 Grape



I140 Magenta




I150 Peach




I160 Royal blue




I170 Light blue



I180 Petrol blue



I190 Emerald
green



I200 Marine blue



I210 Dark green




I220 Mint




I230 Leaf green




I240 Reed green



I250 Green



I260 Brown



I270 Graphite



I280 Steel blue



I290 Light blue




I300 Silver




I310 Fawn brown




I320 Sand



I330 Chestnut



I340 Grey beige




I350 Blue grey




I360 Light grey




I370 Grey




I380 Dark grey




I390 Black



I400 White*



I410 Steel grey



I420 Gold



I430 Salmon
pink



I440 Light green



I450 Sunset

Model Image ECO Style

Backing material	Nitrile rubber coating, thickness approx. 1.4 mm, smooth or dimpled
Border width	Approx. 20 mm
Pile height	Approx. 8 - 9 mm
Pile material	100 % polyamide ECONYL® brand-name fibre, pile weight 900 g/m ²
Height	Approx. 9 - 10 mm
Total weight (g/m²)	2700
Dimension tolerance in %	+/- 3 %
Tread border label	By request
Water absorption	Approx. 3 to 4 litres per m ²
Max. washing temperature °C	60
Fastness to washing	No colour degradation
Oil resistant (nitrile rubber back)	Extremely good
Electrostatic behaviour	Extremely low electrostatic charging, volume resistance 2.2×10^{11} Ohms, in acc. with DIN 54345

Resistance to fire	Available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
Warranty	Statutory warranty period 2 years, subject to proper care, cleaning and storage.
Standard width (cm)	85 x 75 85 x 120 85 x 150 100 x 200 115 x 180 115 x 200 115 x 240 150 x 200 150 x 250 200 x 200 200 x 300 200 x 400 Special dimensions possible, up to 200 x 500 cm

Subject to technical modifications