



# Model Image ECO Style





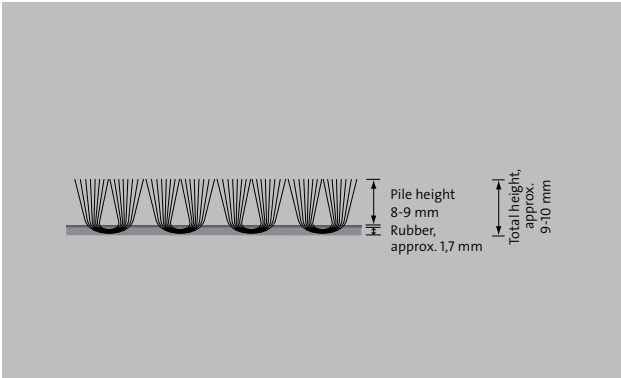

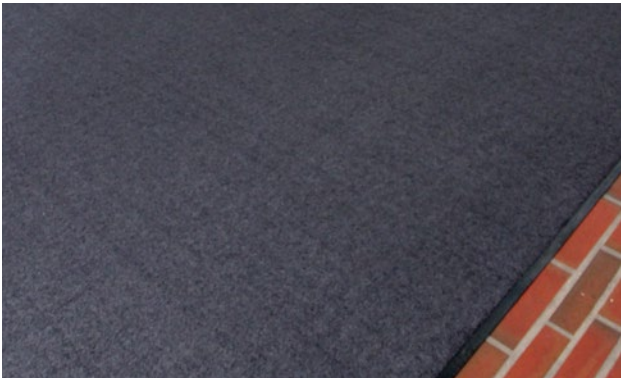




























**Description**  
The emco Image ECO Style for individual special shapes is made of the high-quality, sustainable ECONYL® brand fibre and is characterised by high dirt and moisture absorption. Thanks to its individual printability, emco Image ECO Style also has an excellent advertising effect.



# Model Image ECO Style

Colours

							
I10 Lemon	I20 Yellow	I30 Yellow/orange	I40 Orange	I50 Terracotta	I60 Red	I70 Oxide red	I80 Bordeaux
							
I90 Light red	I100 Cherry	I110 Purple	I120 Lilac	I130 Grape	I140 Magenta	I150 Peach	I160 Royal blue
							
I170 Light blue	I180 Petrol blue	I190 Emerald green	I200 Marine blue	I210 Dark green	I220 Mint	I230 Leaf green	I240 Reed green
							
I250 Green	I260 Brown	I270 Graphite	I280 Steel blue	I290 Light blue	I300 Silver	I310 Fawn brown	I320 Sand
							
I330 Chestnut	I340 Grey beige	I350 Blue grey	I360 Light grey	I370 Grey	I380 Dark grey	I390 Black	I400 White*
							
I410 Steel grey	I420 Gold	I430 Salmon pink	I440 Light green	I450 Sunset			

## Carpet mats

# Model Image ECO Style

<b>Backing material</b>	Nitrile rubber coating, thickness approx. 1.4 mm, smooth or dimpled
<b>Border width</b>	Approx. 20 mm
<b>Pile height</b>	Approx. 8 - 9 mm
<b>Pile material</b>	100 % polyamide ECONYL® brand-name fibre, pile weight 900 g/m <sup>2</sup>
<b>Height</b>	Approx. 9 - 10 mm
<b>Total weight (g/m<sup>2</sup>)</b>	2700
<b>Dimension tolerance in %</b>	+/- 3 %
<b>Tread border label</b>	By request
<b>Water absorption</b>	Approx. 3 to 4 litres per m <sup>2</sup>
<b>Max. washing temperature °C</b>	60
<b>Fastness to washing</b>	No colour degradation
<b>Oil resistant (nitrile rubber back)</b>	Extremely good
<b>Electrostatic behaviour</b>	Extremely low electrostatic charging, volume resistance 2.2 x 10 <sup>11</sup> Ohms, in acc. with DIN 54345

<b>Resistance to fire</b>	Available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.
<b>Warranty</b>	Statutory warranty period 2 years, subject to proper care, cleaning and storage.
<b>Standard width (cm)</b>	85 x 75 85 x 120 85 x 150 100 x 200 115 x 180 115 x 200 115 x 240 150 x 200 150 x 250 200 x 200 200 x 300 200 x 400 Special dimensions possible, up to 200 x 500 cm

Subject to technical modifications/Colours may deviate due to production processes