



Clean-off system

Model MAXIMUS® Image

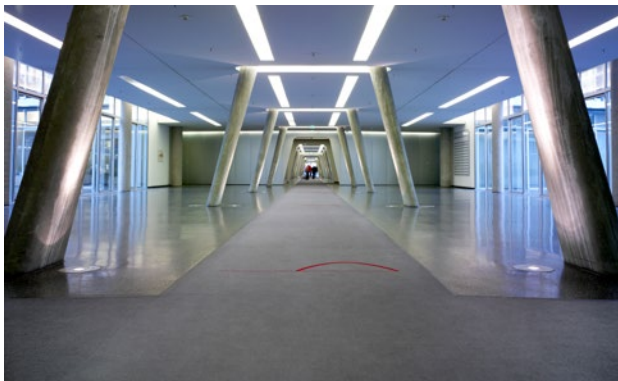

Clean-off floor covering with luxury bonus

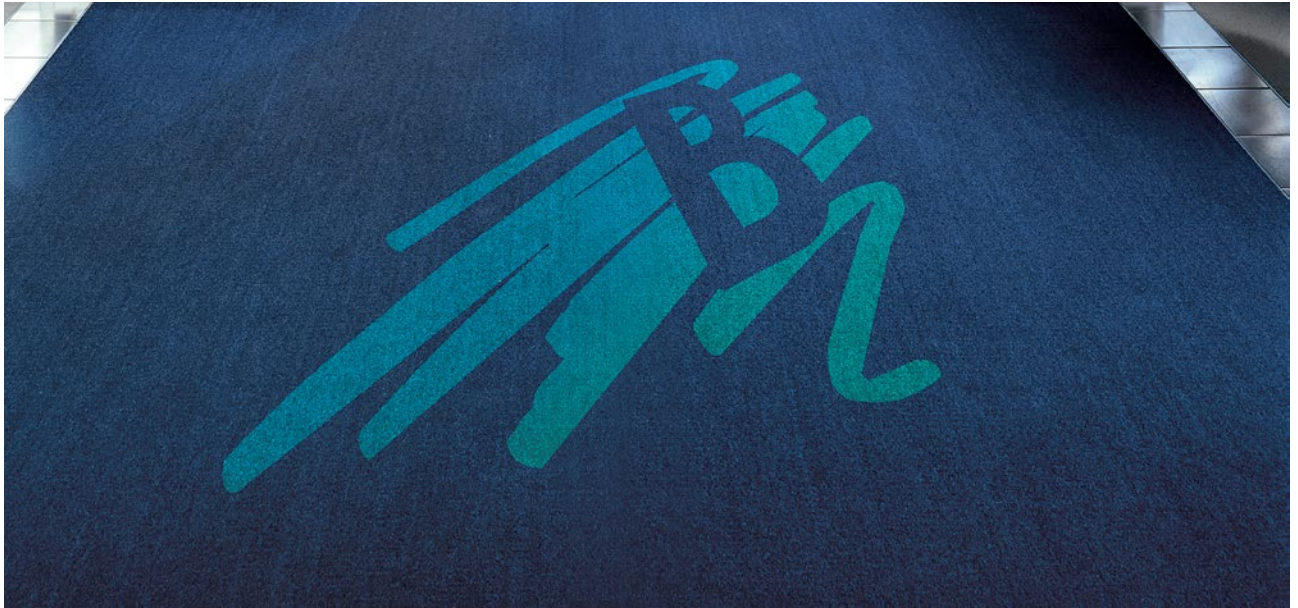

Indoor areas (zone 3)

Description

MAXIMUS® IMAGE combines MAXIMUS® quality with all the benefits of individual design. Available in 45 bright colours as standard, an innovative production technique (chromojet) means that all pantone colours or individually mixed colours can also be used. With MAXIMUS® IMAGE you can produce abstract designs or create products that fit in with a specific corporate identity (bearing logos or in company colours, for example) in order to achieve the maximum advertising benefit and put across exactly what information you want.



Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Bfl-s1



Luxurious



class 33 (heavy commercial use)

Model MAXIMUS® Image

Colours



I10 Lemon



I20 Yellow



I30 Yellow/
orange




I40 Orange



I50 Terracotta



I60 Red



I70 Oxide red



I80 Bordeaux



I90 Light red



I100 Cherry



I110 Purple




I120 Lilac




I130 Grape




I140 Magenta




I150 Peach




I160 Royal blue



I170 Light blue




I180 Petrol blue




I190 Emerald
green




I200 Marine blue




I210 Dark green




I220 Mint



I230 Leaf green




I240 Reed green




I250 Green




I260 Brown




I270 Graphite




I280 Steel blue



I290 Light blue




I300 Silver



I310 Fawn brown



I320 Sand




I330 Chestnut




I340 Grey beige



I350 Blue grey




I360 Light grey



I370 Grey




I380 Dark grey




I390 Black



I400 White*



I410 Steel grey



I420 Gold



I430 Salmon
pink



I440 Light green



I450 Sunset

Clean-off system

Model MAXIMUS® Image

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	For mat size up to 200 x 500 cm 1.4 mm nitrile rubber backing. From mat size bigger than 200 x 500 cm polyvinyl chloride
Pile weight / fibre weight	1.000
Total weight (g/m²)	3.410
Overall height (mm)	9
Dimension tolerance in mm	2
Tuft density/m²	138.600
Slip resistance	DS (EN 13893)
Supplied as rolls	Made to measure up to a max. width of 200 cm Special dimensions on request
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive.

Cleaning	Dirt removal with high-performance brush vacuum cleaner The spray extraction method is recommended for periodic thorough cleaning. Mats of the emco Maximus Image type with polyvinyl chloride coating can be cleaned easily with lots of water, not above a water temperature of 40°C. Mats of the emco Maximus Image type with NBR coating can be washed with a max. water temperature of 60°C. emco recommends a water temperature of between 40°C and 50°C. Do not use any chlorinated hydrocarbons (tetrachloride).
Brand	emco

Suitable for:
Retirement homes and Care-/Nursery Homes
medical practice
Offices and administrative buildings
Family home
Hotel
Kindergarten/Nursery
Apartment building
School

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com