


# Model MAXIMUS® Image

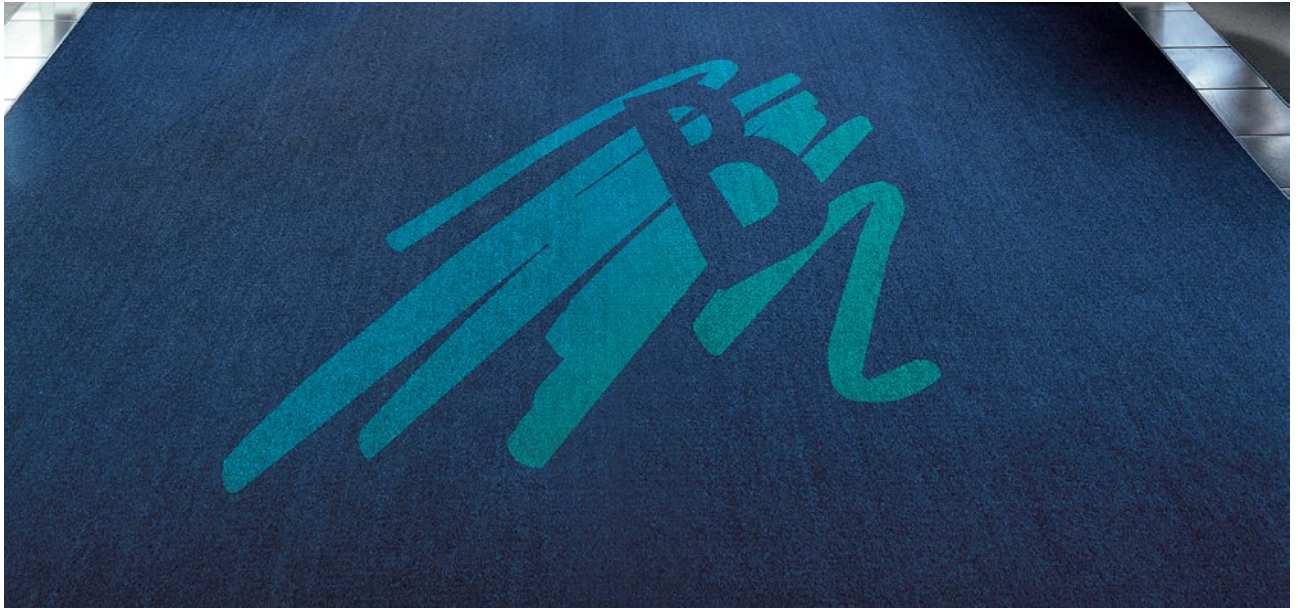


Clean-off floor covering with luxury bonus

1 2 3 Indoor areas (zone 3)

### Description

MAXIMUS® IMAGE combines MAXIMUS® quality with all the benefits of individual design. Available in 45 bright colours as standard, an innovative production technique (chromojet) means that all pantone colours or individually mixed colours can also be used. With MAXIMUS® IMAGE you can produce abstract designs or create products that fit in with a specific corporate identity (bearing logos or in company colours, for example) in order to achieve the maximum advertising benefit and put across exactly what information you want.

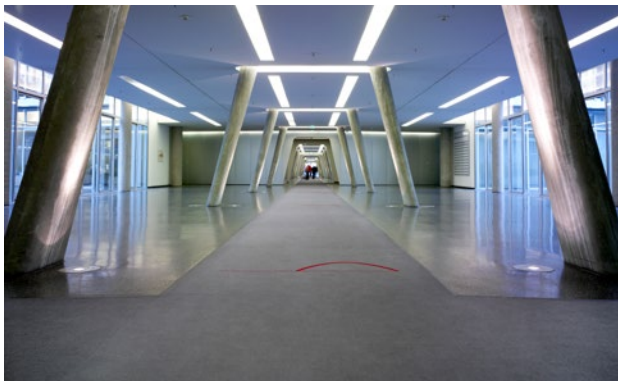

Anti-static



Castor-resistant



Suitable for stairs



DS (EN 13893)



Resistant strength



Bfl-s1



Luxurious



Property suitable inlay 33

# Model MAXIMUS® Image

### Colours



I10 Lemon



I20 Yellow



I30 Yellow/  
orange



I40 Orange




I50 Terracotta



I60 Red




I70 Oxide red



I80 Bordeaux



I90 Light red



I100 Cherry



I110 Purple



I120 Lilac




I130 Grape




I140 Magenta




I150 Peach




I160 Royal blue




I170 Light blue



I180 Petrol blue



I190 Emerald  
green



I200 Marine blue



I210 Dark green




I220 Mint




I230 Leaf green




I240 Reed green




I250 Green



I260 Brown



I270 Graphite



I280 Steel blue



I290 Light blue




I300 Silver




I310 Fawn brown




I320 Sand




I330 Chestnut



I340 Grey beige




I350 Blue grey




I360 Light grey




I370 Grey




I380 Dark grey




I390 Black



I400 White\*



I410 Steel grey



I420 Gold



I430 Salmon  
pink



I440 Light green



I450 Sunset

# Model MAXIMUS® Image

<b>Construction</b>	Tufting-Velours 1/8"
<b>Pile above substrate</b>	100% polyamide
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	For mat size up to 200 x 500 cm 1.4 mm nitrile rubber backing. From mat size bigger than 200 x 500 cm polyvinyl chloride
<b>Pile weight / fibre weight</b>	1.000
<b>Total weight (g/m<sup>2</sup>)</b>	3.410
<b>Overall height (mm)</b>	9
<b>Dimension tolerance in mm</b>	+/- 2 %
<b>Tuft density/m<sup>2</sup></b>	138.600
<b>Slip resistance</b>	DS (EN 13893)
<b>Supplied as rolls</b>	Made to measure up to a max. width of 200 cm Special dimensions on request
<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive.

<b>Cleaning</b>	Dirt removal with high-performance brush vacuum cleaner The spray extraction method is recommended for periodic thorough cleaning. Mats of the emco Maximus Image type with polyvinyl chloride coating can be cleaned easily with lots of water, not above a water temperature of 40°C. Mats of the emco Maximus Image type with NBR coating can be washed with a max. water temperature of 60°C. emco recommends a water temperature of between 40°C and 50°C. Do not use any chlorinated hydrocarbons (tetrachloride).
<b>Brand</b>	emco

<b>Suitable for:</b>
Retirement homes and Care-/Nursery Homes
medical practice
Offices and administrative buildings
Family home
Hotel
Kindergarten/Nursery
Apartment building
School

Subject to technical modifications