
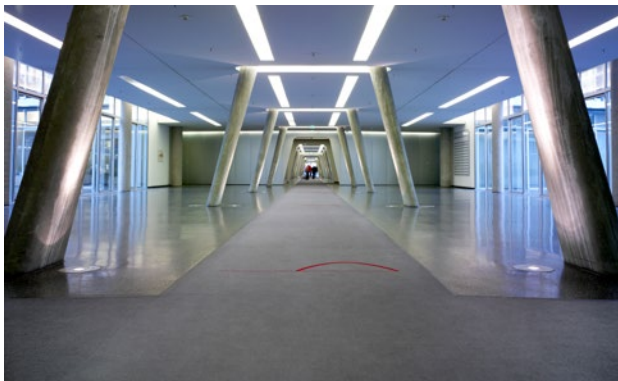


Clean-off system

Model MAXIMUS® Image

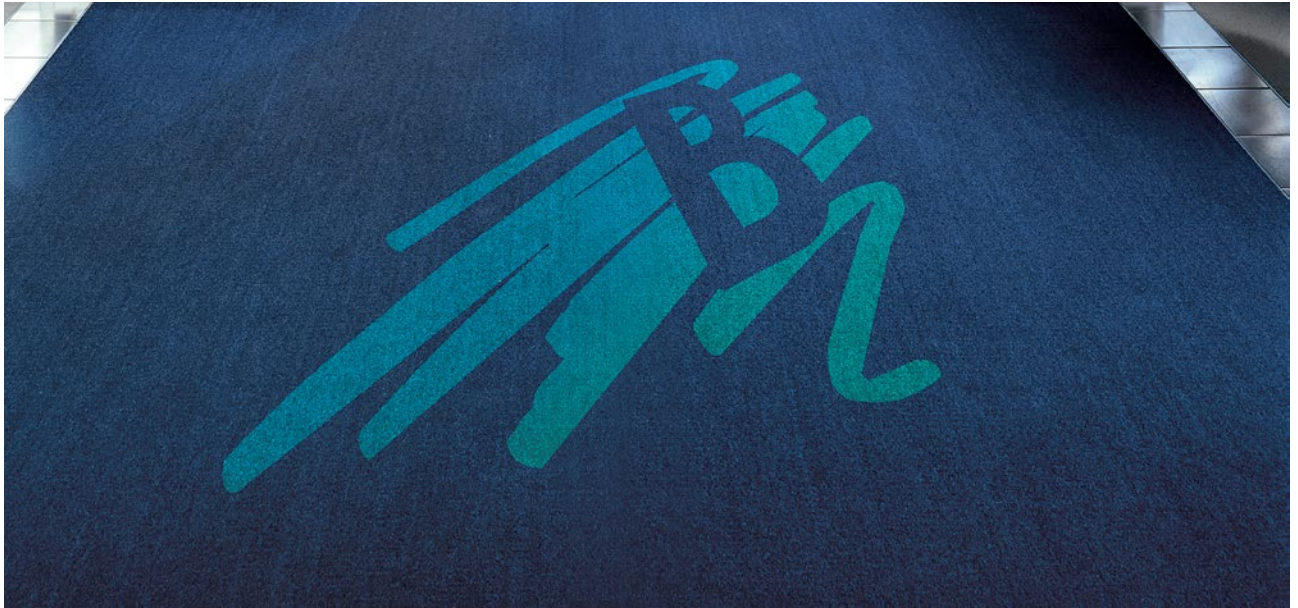

Clean-off floor covering with luxury bonus

1 2 3 Indoor areas (zone 3)

Description

MAXIMUS® IMAGE combines MAXIMUS® quality with all of the benefits of individual design. emco's colour palette comprises 79 colours divided into 60 background colours and 19 spot colours. The background colours are the all-rounders: they are suitable for use as mat backgrounds as well as design elements. Our spot colours, however, are not suitable for backgrounds, but as used in the design as highlights/accent colours. The colour percentage should not exceed 8% (7 x 7 cm) of the total area per spot colour.



Anti-static



Castor-res-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Flammability



Luxurious



Property sui-
table inlay 33

Model MAXIMUS® Image

emco's colour palette comprises 79 colours divided into 60 background colours and 19 spot colours. The background colours are the all-rounders: they are suitable for use as mat backgrounds as well as design elements. Our spot colours, however are not suitable for backgrounds, but as used in the design as highlights/accent colours. The colour percentage should not exceed 8% (7 x 7 cm) of the total area per spot colour.


Background colours



Clean-off system

Model MAXIMUS® Image

Spot colours

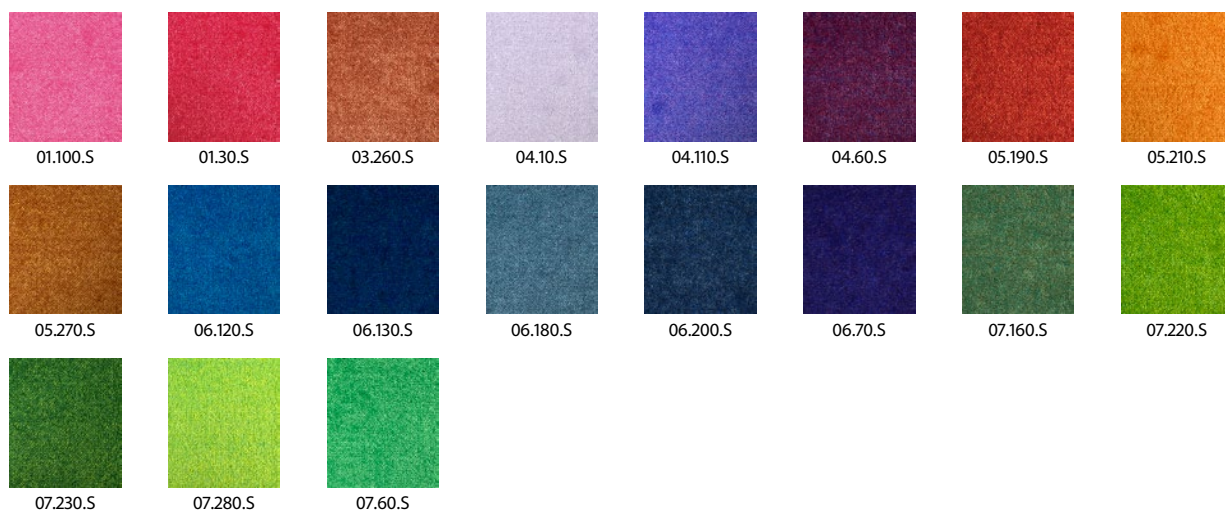

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	For mat size up to 200 x 500 cm 1.4 mm nitrile rubber backing. From mat size bigger than 200 x 500 cm polyvinyl chloride
Pile weight / fibre weight	1.000
Total weight (g/m²)	3.410
Overall height (mm)	9
Dimension tolerance in mm	+/- 2 %
Tuft density/m²	138.600
Slip resistance	DS (EN 13893)
Supplied as rolls	Made to measure up to a max. width of 200 cm Special dimensions on request
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive.

Cleaning	Dirt removal with high-performance brush vacuum cleaner The spray extraction method is recommended for periodic thorough cleaning. Mats of the emco Maximus Image type with polyvinyl chloride coating can be cleaned easily with lots of water, not above a water temperature of 40°C. Mats of the emco Maximus Image type with NBR coating can be washed with a max. water temperature of 60°C. emco recommends a water temperature of between 40°C and 50°C. Do not use any chlorinated hydrocarbons (tetrachloride).
Brand	emco

Suitable for:	
	Retirement homes and Care-/Nursery Homes
	medical practice
	Offices and administrative buildings
	Family home
	Hotel
	Kindergarten/Nursery
	Apartment building
	School

Subject to technical modifications/Colours may deviate due to production processes