


Non-slip underlay for smooth underlay

Model PRIMA

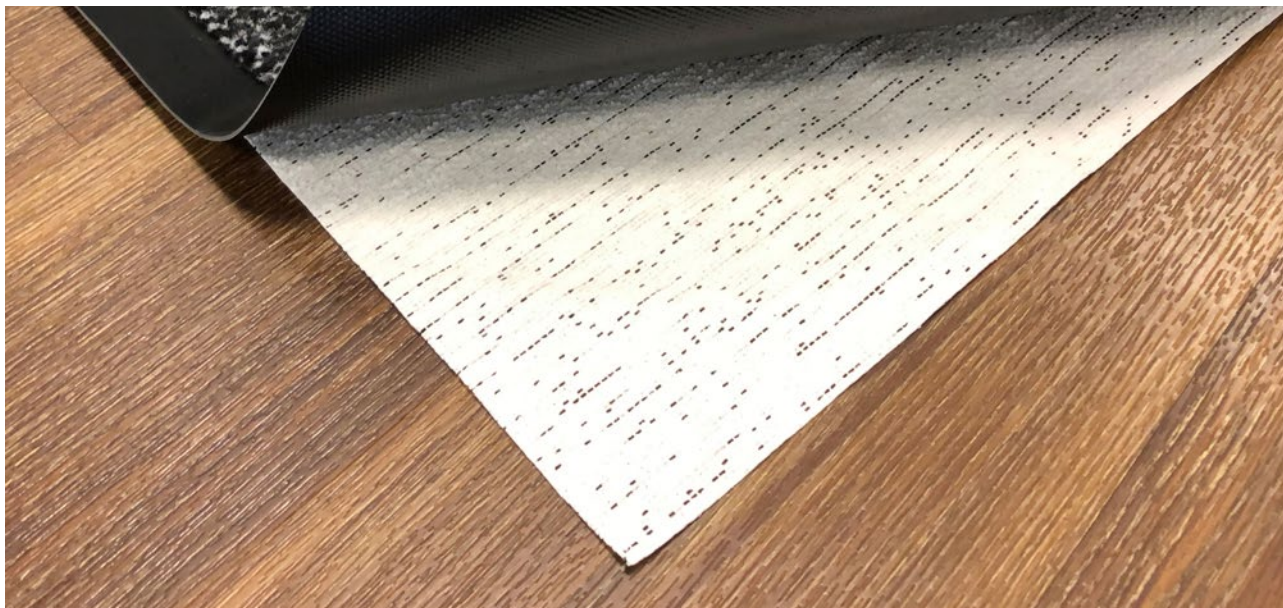

Non-slip underlay for smooth underlay

Model PRIMA

Properties	Effect with no adhesive non-slip, dimensionally stable, absorbs the sound of footsteps, hard- wearing, easy to lay and cut
Function	The underlay stops the clean-off zone from slipping out of place on nearly all smooth floor surfaces.
Laying	Simply lay the non-slip underlay under the clean-off zone. Note: no adhesive or anti-slip effect when wet!
Colours	White

Rolls (running metres)	30
Width (cm)	80 120 180
Material structure	PES/glass yarn fabric, coated on both sides with special acrylate foam.
Thickness	Approx. 2 mm
Weight (g/m²)	approx. 420-450 g/m ²

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com

