


**Non-slip underlay for smooth underlay**

---

## **Model PRIMA**

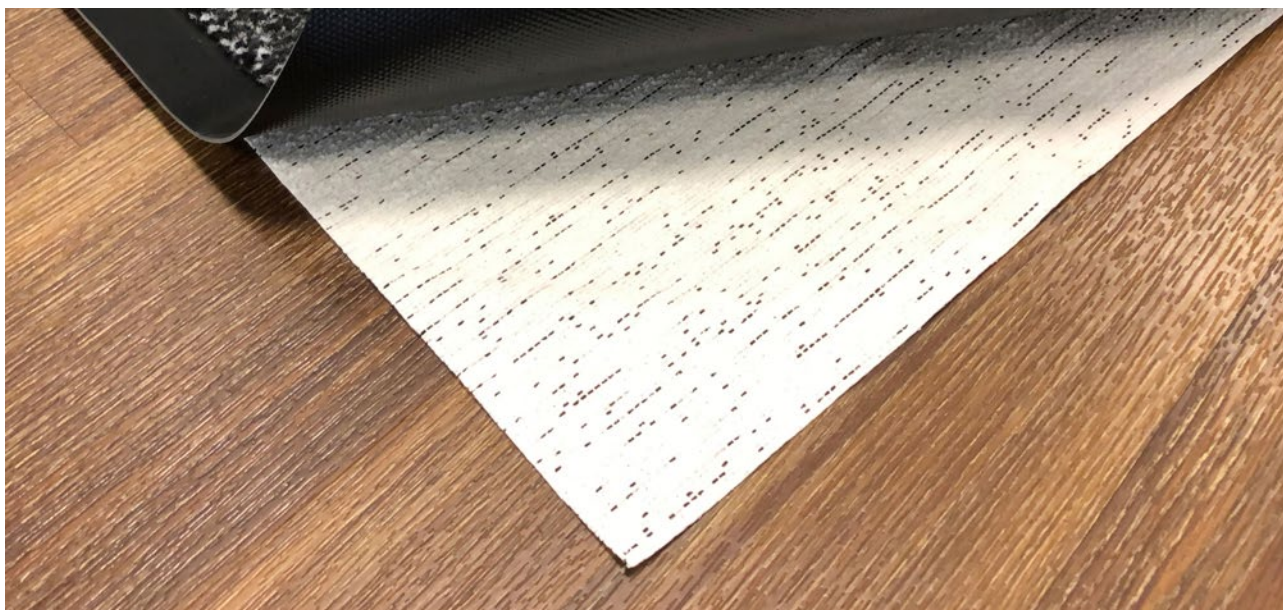

## Non-slip underlay for smooth underlay

---

### Model PRIMA

|                   |   |
|-------------------|---|
| <b>Properties</b> | Effect with no adhesive<br><br>non-slip, dimensionally stable,<br>absorbs the sound of footsteps, hard-<br>wearing, easy to lay and cut |
| <b>Function</b>   | The underlay stops the clean-off zone<br>from slipping out of place on nearly all<br>smooth floor surfaces.                             |
| <b>Laying</b>     | Simply lay the non-slip underlay under<br>the clean-off zone. Note: no adhesive or<br>anti-slip effect when wet!                        |
| <b>Colours</b>    | White   |

|                                 |  |
|---------------------------------|--|
| <b>Rolls (running metres)</b>   | 30   |
| <b>Width (cm)</b>               | 80<br>120<br>180   |
| <b>Material structure</b>       | PES/glass yarn fabric, coated on both<br>sides with special acrylate foam. |
| <b>Thickness</b>                | Approx. 2 mm   |
| <b>Weight (g/m<sup>2</sup>)</b> | approx. 420-450 g/m <sup>2</sup>   |

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:  
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@  
emco.de · [www.emco-bau.com](http://www.emco-bau.com)

