


emco dirt collection well

Model 5017 CN



emco dirt collection wells are required to counter the increased dirt levels in heavily frequented entrance areas. Together with the more resilient entrance mats emco MARSCHALL (not in combination with a scraper bar or brush strip) and emco PLAZA, they form a unit that cannot be surpassed in terms of cleaning efficiency and practicality.

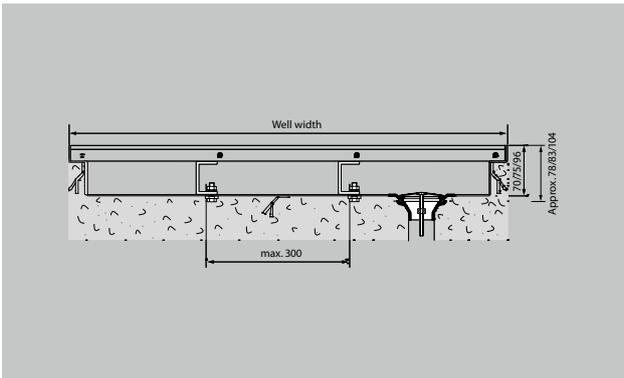

Description

Dirt collection wells developed for emco MARSCHALL and emco PLAZA entrance mats for increased dirt uptake. Available with drainage system.



Outside (Zone 1)



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Damp street dust, damp sand deposits, dust, etc.



emco dirt collection well

Model 5017 CN

Weight (kg/m²)	18,5
Description	Dirt collection wells developed for emco MARSCHALL and emco PLAZA entrance mats for increased dirt uptake. Available with drainage system.
Technical details	Max. one-piece tray segment 1200 x 1000 mm.
Structure	A dirt collection well unit can consist of either a single well or multiple wells which may vary in width and depth, assembled in a modular fashion. From a visual and functional perspective, the entrance mat is manufactured either in the same size without a frame, or - more commonly - with a frame.
Special shapes	Dirt collection wells are also available in special shapes (such as rounded shapes) to ensure they are the perfect match for the building in question. Please contact us for further information.
Material	Stainless steel (V2A), bonded and watertight, interior completely smooth for easy cleaning.

Support profile	Stainless steel (V2A), max. spacing 300 mm with recesses for all-around water drainage. These profiles must run laterally at an angle of 90° beneath the profiles.
Additional data	The support for the entrance mat is integrated in the well.
Larger dimensions	Several well components are screwed together on site to form a single system.
Fittings	With welded wall anchors; drainage system available on request.
Drainage system	Complete drainage system, consisting of a flat outlet (Ø 80 mm) made from stainless steel, and a plastic lower part for subsequent connection to the drainage system (Ø 1 1/2 inches).
Well overall height	70
Well installation height (mm)	78
Max. well width, one piece (mm)	1200
Max. well depth, one piece (mm)	1000
Model	5017 CN

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

