
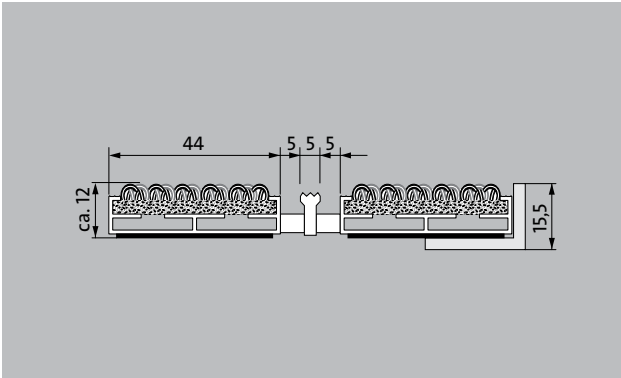


emco DIPLOMAT Premium Large With Outdoor insert and scraping edge

Model 512 PL Outdoor K

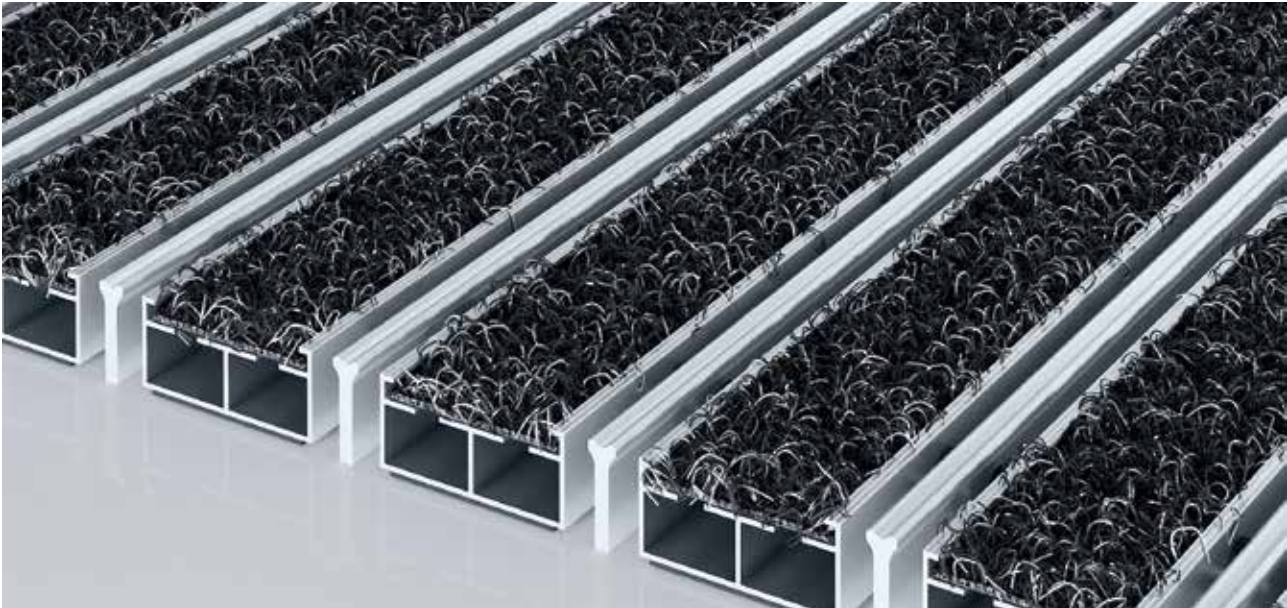

The extra-wide and weather-resistant premium entrance mat with the Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to average to heavy footfall.

1 **2** **3** Outside (Zone 1)

Description

Rollable and hard-wearing premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



5 years guarantee



class 33 (heavy commercial use)



emco DIPLOMAT Premium Large With Outdoor insert and scraping edge

Model 512 PL Outdoor K

Approx. height (mm)	12	Accessories
Roll-over and drive-over capability:	Prams Sack-/hand truck Wheelchairs	emco installation frame 500: 500-15 AL Aluminium emco installation frame 500: 500-15 CN Chrome-nickel steel (V2A) emco ramp edge: A12 Aluminium emco cover strip: C12 Chrome-nickel steel (V2A) emco INOX®: LINEO 12 Chrome-nickel steel (V2A) Rubber underlay 1 mm: GU 1 Rubber underlay 3 mm: GU 3 Rubber underlay 5 mm: GU 5 Mat joining brackets: MV Supplied as standard with mats in several parts
Standard profile clearance approx. (mm)	5 mm, rubber spacers	
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	
Connection	Plastic-coated stainless steel cable	
Max. width/profile length for individual section (mm):	3000	
Profile width (mm)	44	Suitable for:
Depth/walking depth for individual section (mm):	1500	Residential and care homes medical practice Family home Apartment building Sports hall
Weight (kg/m²)	8.7	
Mat divisions as per factory standards or customer specifications	from a profile length of 3000 mm or a maximum mat weight of 25 kg	
Support chassis	Made using rigid aluminium with Premium sound absorbing insulation on the underside	Service and services
Tread surface	The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile increases the cleaning power.	Construction site advice Dimensioning Measured using laser measuring device on site. Installation service Fitting and installation service Repairs The product can be disposed of or recycled in an environmentally friendly way.
Flammability	Insert with fire classification Cf1-s1 according to EN 13501.	
Pile material	100% PA 6 (polyamide)	
Use classification EN1307	class 33 (heavy commercial use)	

Model 512 PL Outdoor K

Colours



Anthracite



Brown



Red

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

