


Model 512 PSL Innova K

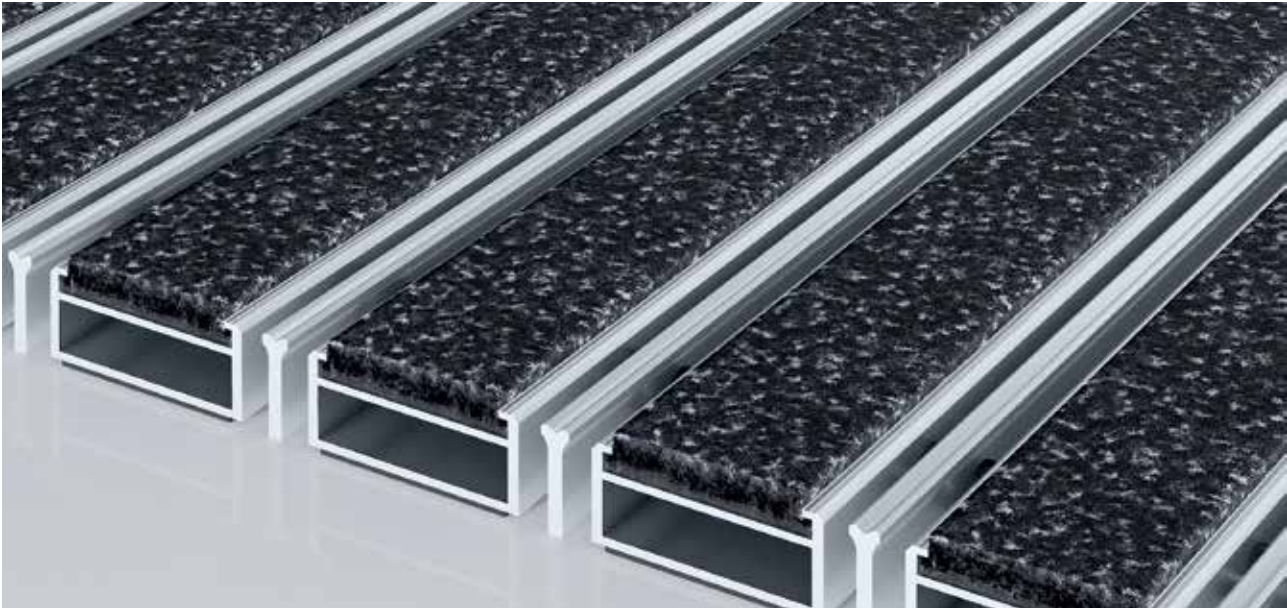

The extra-wide Premium entrance mat with the particularly adaptable Innova insert has a distinguished appearance and improves room acoustics. Particularly suitable for collecting fine dirt. The additional profile provides an extra cleaning effect. Ideal for buildings with normal to heavy loads.

- 1
 - 2
 - 3
- Indoor and outdoor (covered, Zone 1+2)

Description

Rollable, extremely hard-wearing, premium entrance mat with extra-wide profile bars and performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.

				
Indoor and outdoor (covered, Zone 1+2)	Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.	Damp street dust, damp sand deposits, dust, etc.	5 years guarantee	Cfl-s1



class 31 (moderate commercial use)

emco MARSCHALL Premium Large With Innova insert and scraping edge

Model 512 PSL Innova K

Approx. height (mm)	12	Suitable for:	
Roll-over and drive-over capability:	Prams	Residential and care homes	
	Sack-/hand truck	medical practice	
	Wheelchairs	Offices and administrative buildings	
Standard profile clearance approx. (mm)	5 mm, rubber spacers	Family home	
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	Retail sector	
		Hotel	
Connection	Plastic-coated stainless steel cable	Kindergarten/Nursery	
Max. width/profile length for individual section (mm):	3000	Apartment building	
		School	
Profile width (mm)	46.5	Sports hall	
Depth/walking depth for individual section (mm):	800		
Weight (kg/m²)	10,3	Insert certified to TÜV PROFICERT- product interior (Standard)	
Mat divisions as per factory standards or customer specifications	from a profile length of 3000 mm or a maximum mat weight of 25 kg	French VOC regulation	
		LEED v4 (outside North America)	
Support chassis	Reinforced support chassis made using rigid aluminium with Premium sound absorbing insulation on the underside	BREEAM Exemplary Level	
		Belgian VOC regulation	
		AgBB (Committee for Health-related Evaluation of Building Products)	
Tread surface	The exceptionally flexible Innova insert not only creates a sophisticated impression but also improves room acoustics. The additional profile increases the cleaning power.	MVV TB Appendix 8, 9 / ABG	
Flammability	Insert with fire classification Cfl-s1 according to EN 13501.	Service and services	
Pile material	100% PA 6 (polyamide)	Construction site advice	
Use classification EN1307	class 33 (heavy commercial use)	Dimensioning	
		Measured using laser measuring device on site.	
		Installation service	
		Fitting and installation service	
		Repairs	
		The product can be disposed of or recycled in an environmentally friendly way.	
Accessories			
emco installation frame 500: 500-15 AL Aluminium			
emco installation frame 500: 500-15 CN Chrome-nickel steel (V2A)			
emco ramp edge: A12 Aluminium			
emco cover strip: C12 Chrome-nickel steel (V2A)			
emco INOX®: LINEO 12 Chrome-nickel steel (V2A)			
Rubber underlay 1 mm: GU 1			
Rubber underlay 3 mm: GU 3			
Rubber underlay 5 mm: GU 5			
Mat joining brackets: MV Supplied as standard with mats in several parts			

Model 512 PSL Innova K


Colours



36.01 black



36.02 anthracite

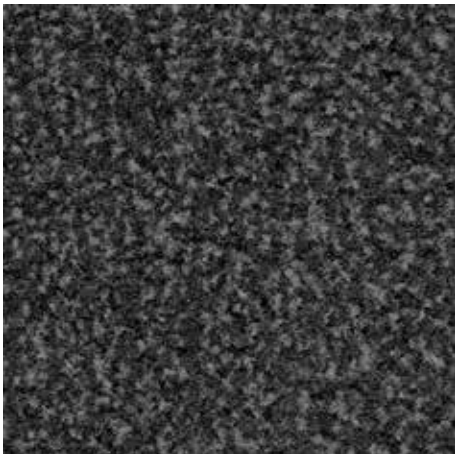

36.03 grey

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

EMCO