


# Model 512 P Outdoor K

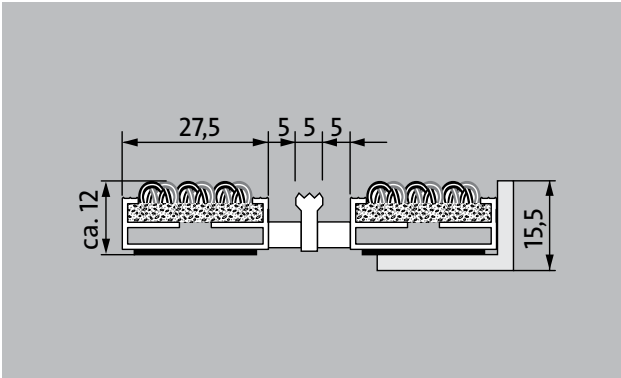

The weather-resistant premium entrance mat with the Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to average to heavy footfall.

- 1**
- 2**
- 3** Outside (Zone 1)

**Description**

Rollable and hard-wearing premium entrance mat with performance insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



5 years guarantee



class 33 (heavy commercial use)

# emco DIPLOMAT Premium With Outdoor insert and scraping edge

## Model 512 P Outdoor K

<b>Approx. height (mm)</b>	12	<b>Accessories</b>
<b>Roll-over and drive-over capability:</b>	Prams Sack-/hand truck Wheelchairs	emco installation frame 500: 500-15 AL Aluminium emco installation frame 500: 500-15 CN Chrome-nickel steel (V2A) emco ramp edge: A12 Aluminium emco cover strip: C12 Chrome-nickel steel (V2A) emco INOX®: LINEO 12 Chrome-nickel steel (V2A)
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers	Rubber underlay 1 mm: GU 1 Rubber underlay 3 mm: GU 3 Rubber underlay 5 mm: GU 5 Mat joining brackets: MV Supplied as standard with mats in several parts
<b>Automatic door systems</b>	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	
<b>Connection</b>	Plastic-coated stainless steel cable	
<b>Max. width/profile length for individual section (mm):</b>	3000	
<b>Profile width (mm)</b>	27.5	<b>Suitable for:</b>
<b>Depth/walking depth for individual section (mm):</b>	1500	Residential and care homes medical practice Family home Apartment building Sports hall
<b>Weight (kg/m<sup>2</sup>)</b>	8.7	
<b>Mat divisions as per factory standards or customer specifications</b>	from a profile length of 3000 mm or a maximum mat weight of 25 kg	
<b>Support chassis</b>	Made using rigid aluminium with Premium sound absorbing insulation on the underside	<b>Service and services</b>
<b>Tread surface</b>	The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt. The additional profile increases the cleaning power.	Construction site advice Dimensioning Measured using laser measuring device on site. Installation service Fitting and installation service Repairs The product can be disposed of or recycled in an environmentally friendly way.
<b>Flammability</b>	Insert with fire classification Cf1-s1 according to EN 13501.	
<b>Pile material</b>	100% PA 6 (polyamide)	
<b>Use classification EN1307</b>	class 33 (heavy commercial use)	

## **Model 512 P Outdoor K**

### **Colours**



Anthracite



Brown



Red

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · www.emco-bau.com

**EMCO**