


# Model 512 SG

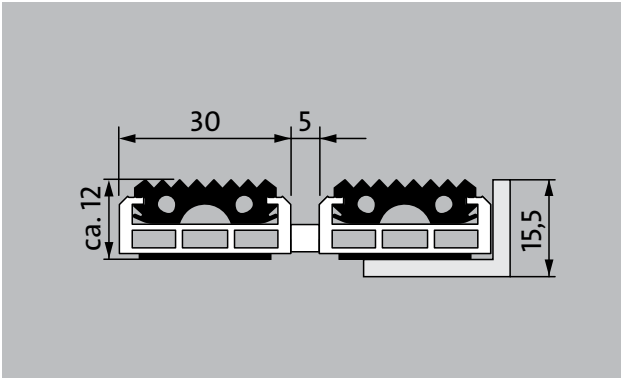


The original entrance mat with the profiled rubber insert for the noticeably thorough removal of coarse dirt. Ideal for buildings with normal to heavy loads.

**1** **2** **3** Outside (Zone 1)

**Description**

Rollable, extremely hard-wearing, original entrance mat with standard insert for supported installation options. Also capable of withstanding wheeled traffic. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.

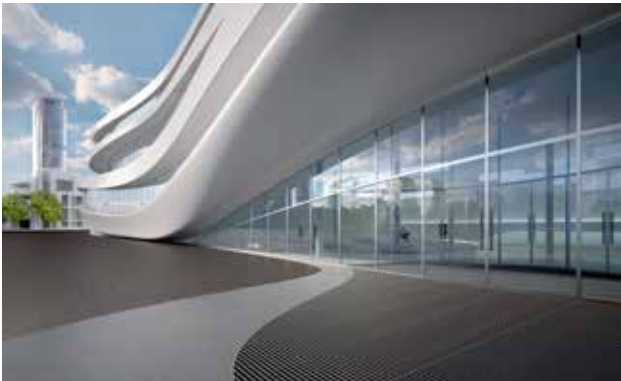

Outside (Zone 1)	Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles	R 9 slip resistance as per DIN 51130	Extremely durable	4 year warranty


# emco MARSCHALL Original With rubber insert

## Model 512 SG

<b>Approx. height (mm)</b>	12	<b>Accessories</b>
<b>Roll-over and drive-over capability:</b>	Prams	emco installation frame 500: 500-15 AL Aluminium
	Sack-/hand truck	emco installation frame 500: 500-15 CN Chrome-nickel steel (V2A)
	Wheelchairs	emco ramp edge: A12 Aluminium
	Light shopping trolleys	emco cover strip: C12 Chrome-nickel steel (V2A)
	hand trolleys	emco INOX®: LINEO 12 Chrome-nickel steel (V2A)
	pallet trucks	Rubber underlay 1 mm: GU 1
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers	Rubber underlay 3 mm: GU 3
<b>Automatic door systems</b>	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	Rubber underlay 5 mm: GU 5
<b>Connection</b>	Plastic-coated stainless steel cable	emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.
<b>Max. width/profile length for individual section (mm):</b>	3000	emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles
<b>Profile width (mm)</b>	30	emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles
<b>Depth/walking depth for individual section (mm):</b>	1500	Mat joining brackets: MV Supplied as standard with mats in several parts
<b>Weight (kg/m<sup>2</sup>)</b>	15,5	
<b>Mat divisions as per factory standards or customer specifications</b>	from a profile length of 3000 mm or a maximum mat weight of 25 kg	<b>Suitable for:</b>
<b>Support chassis</b>	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside	Residential and care homes
<b>Tread surface</b>	Recessed, robust, weather-proof profiled rubber inserts.	medical practice
<b>Slip resistance</b>	R 9 slip resistance as per DIN 51130	Offices and administrative buildings
<b>Flammability</b>	Complete mat system available on request (surcharge applicable) with fire classification Cf1-s1 according to EN 13501.	Family home
		Retail sector
		Hotel
		Kindergarten/Nursery
		Apartment building
		School
		Sports hall
		<b>Service and services</b>
		Construction site advice
		Dimensioning
		Measured using laser measuring device on site.
		Installation service
		Fitting and installation service
		Ribbed carpet strips can be subsequently replaced on site by a emco service engineer (mobile ribbed carpet replacement machine).
		Repairs
		The product can be disposed of or recycled in an environmentally friendly way.

## **Model 512 SG**

### **Colours**

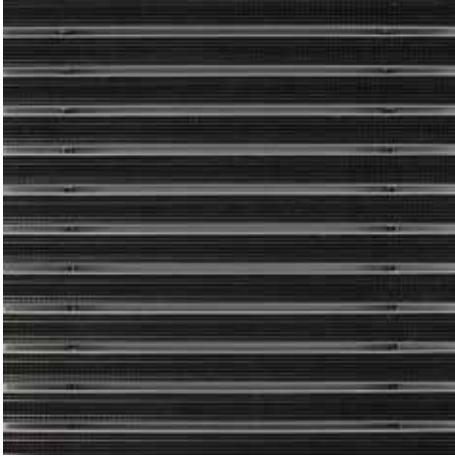

Rubber

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · www.emco-bau.com