


Model 517 SRK

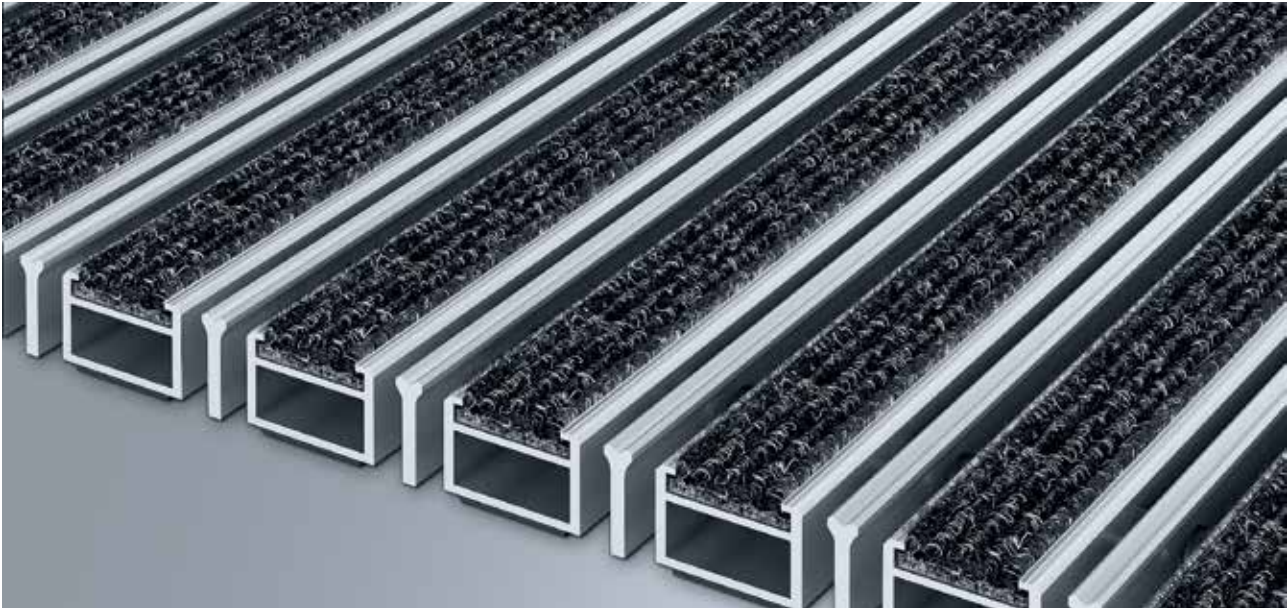

The original entrance mat with the effective, coarse-fibre rib insert is exceptionally abrasion resistant and offers maximum dimensional stability. Particularly ideal for collecting fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to extreme footfall.

- 1
 - 2
 - 3
- Indoor and outdoor (covered, Zone 1+2)

Description

Roll-up, extremely hard-wearing Original entrance mat with Standard insert for surface installation. Customisable width and depth without alignment profile. Available in any geometric shape.



-  Indoor and outdoor (covered, Zone 1+2)
-  Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.
-  4 year warranty

emco MARSCHALL Original With ribbed carpet insert and scraper bar

Model 517 SRK

Approx. height (mm)	17	Accessories
Roll-over and drive-over capability:	Prams	emco installation frame 500: 500-20 AL Aluminium
	Sack-/hand truck	emco installation frame 500: 500-20 AL NEU Aluminium
	Wheelchairs	emco installation frame 500: 500-20 CN Chrome-nickel steel (V2A)
Standard profile clearance approx. (mm)	5 mm, rubber spacers	emco ramp edge: A17 Aluminium
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	emco T-profile: T17
		emco cover strip: C17 Chrome-nickel steel (V2A)
Connection	Plastic-coated stainless steel cable	emco INOX®: LINEO 17 Chrome-nickel steel (V2A)
Max. width/profile length for individual section (mm):	3000	emco INOX®: QUADRO 17 Chrome-nickel steel (V2A)
		Rubber underlay 1 mm: GU 1
		Rubber underlay 3 mm: GU 3
Profile width (mm)	30	Rubber underlay 5 mm: GU 5
Depth/walking depth for individual section (mm):	3000	Mat joining brackets: MV Supplied as standard with mats in several parts
Weight (kg/m²)	13,4	Suitable for:
Mat divisions as per factory standards or customer specifications	As of a profile length of 3000 mm or a maximum mat weight of 45 kg	Residential and care homes
		Arena
Support chassis	Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside	medical practice
		Train station
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips, also with scraper bars mounted between the profiles.	DIY store
		Offices and administrative buildings
Flammability	Insert available on request (surcharge applicable) with fire classification Cf1-s1 according to EN 13501.	Family home
		Shopping centre
Pile material	100% PP (polypropylene)	Retail sector
		University / Higher education institution
Colour fastness to artificial light ISO 105-B02	good 6	airport
Colour fastness to rubbing ISO 105 X12	good 4	Hotel
Colour fastness to water ISO 105 E01	good 5	Industry
		Kindergarten/Nursery
		Warehouse
		Apartment building
		Trade fair
		School
		Sports hall
		Insert certified to TÜV PROFICERT- product interior (Standard)
		French VOC regulation
		LEED v4 (outside North America)
		BREEAM Exemplary Level
		Belgian VOC regulation
		AgBB (Committee for Health-related Evaluation of Building Products)
		MVV TB Appendix 8, 9 / ABG

emco MARSCHALL Original With ribbed carpet insert and scraper bar

Model 517 SRK

Service and services	Installation service
Construction site advice	Fitting and installation service
Dimensioning	Repairs
Measured using laser measuring device on site.	The product can be disposed of or recycled in an environmentally friendly way.



Model 517 SRK

Colours



Light grey no. 220



Anthracite no. 200



Red no. 305



Brown no. 485



Sand no. 430

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com