
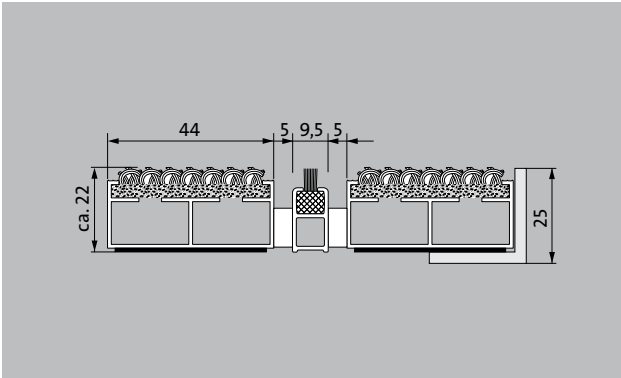


emco DIPLOMAT Original Large With ribbed carpet insert and brush strip

Model 522 LRB

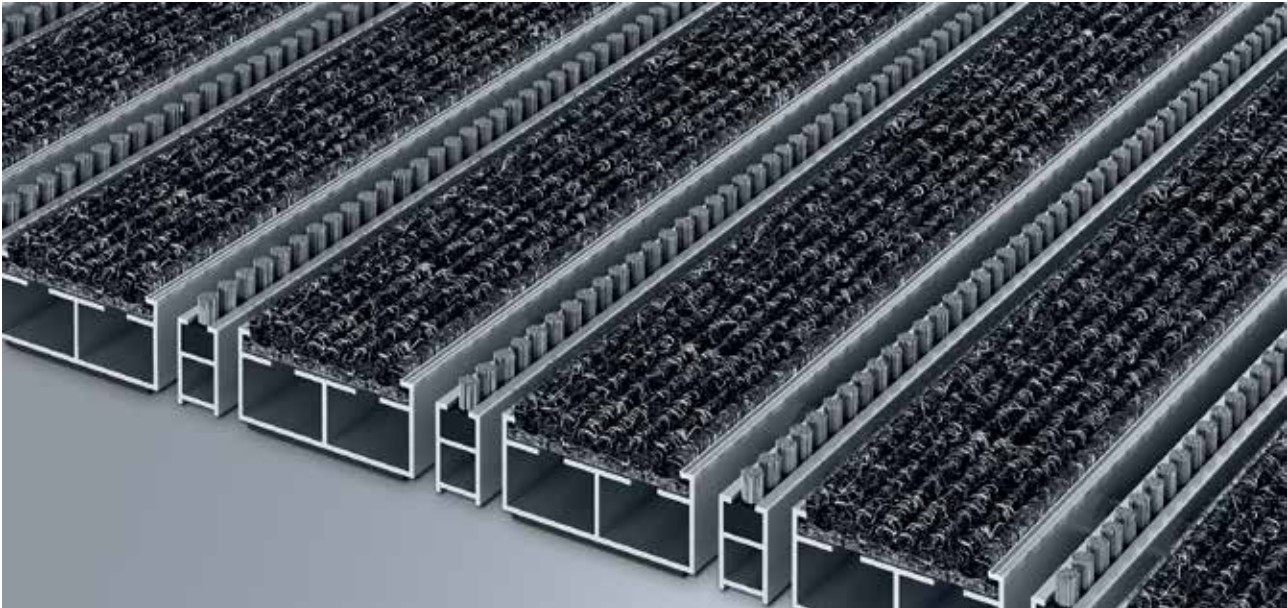

The extra-wide original entrance mat with the effective, coarse-fibre rib insert is exceptionally abrasion resistant and offers maximum dimensional stability. Particularly ideal for collecting fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to average to heavy footfall.

- 1
- 2
- 3 Indoor and outdoor (covered, Zone 1+2)

Description

Rollable and hard-wearing original entrance mat with extra-wide profile bars and standard insert for supported installation options. Customisable widths and walking depths available without a compensation profile. Available in any geometric shape.



- Indoor and outdoor (covered, Zone 1+2)
- Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.
- 4 year warranty



emco DIPLOMAT Original Large With ribbed carpet insert and brush strip

Model 522 LRB

Approx. height (mm)	22	Accessories	
Roll-over and drive-over capability:	Prams		emco installation frame 500: 500-25 AL Aluminium
	Sack-/hand truck		emco installation frame 500: N500-25 AL Aluminium
	Wheelchairs		emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)
Standard profile clearance approx. (mm)	5 mm, rubber spacers		emco installation frame 500: N500-25 CN Chrome-nickel steel (V2A)
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005		emco LUMINA: LUMINA + LED Aluminium
			emco LUMINA: LUMINA Aluminium
Connection	Plastic-coated steel cable		emco LUMINA: LUMINA VIA Aluminium
Max. width/profile length for individual section (mm):	3000		emco ramp edge: A17 Aluminium
			emco T-profile: T22
Profile width (mm)	44		emco cover strip: C22 Chrome-nickel steel (V2A)
Depth/walking depth for individual section (mm):	1500		emco INOX®: LINEO 22 Chrome-nickel steel (V2A)
			emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)
Weight (kg/m²)	9.7		Rubber underlay 1 mm: GU 1
Mat divisions as per factory standards or customer specifications	As of a profile length of 3000 mm or a maximum mat weight of 45 kg	Rubber underlay 3 mm: GU 3	
		Rubber underlay 5 mm: GU 5	
Support chassis	Made using rigid aluminium with sound absorbing insulation on the underside	Mat joining brackets: MV Supplied as standard with mats in several parts	
Tread surface	Recessed, robust, weather-proof, ribbed carpet strips, also with brush strips mounted between the profiles.	Suitable for:	
		Residential and care homes	
Flammability	Insert for Light Grey and Anthracite ribbed carpet colours available on request (surcharge applicable) with fire classification Cfl-s1 according to EN 13501.	medical practice	
		Offices and administrative buildings	
Pile material	100% PP (polypropylene)	Family home	
Colour fastness to artificial light ISO 105-B02	good 6	Retail sector	
		Hotel	
Colour fastness to rubbing ISO 105 X12	good 4	Kindergarten/Nursery	
		Apartment building	
Colour fastness to water ISO 105 E01	good 5	School	
		Sports hall	

Service and services
Construction site advice
Dimensioning
Measured using laser measuring device on site.
Installation service
Fitting and installation service
Repairs
The product can be disposed of or recycled in an environmentally friendly way.

emco DIPLOMAT Original Large With ribbed carpet insert and brush strip

Model 522 LRB

Colours



Light grey no. 220



Anthracite no. 200




Red no. 305



Brown no. 485



Sand no. 430

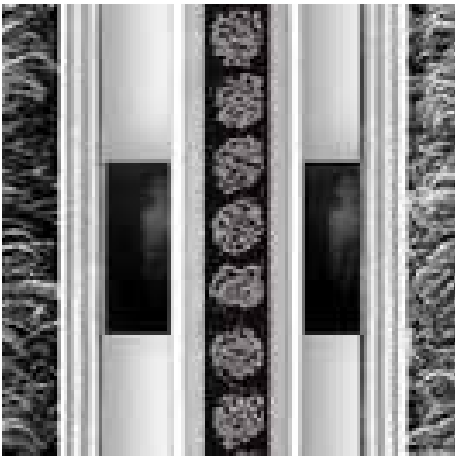


grey

emco DIPLOMAT Original Large With ribbed carpet insert and brush strip

Model 522 LRB

Colours

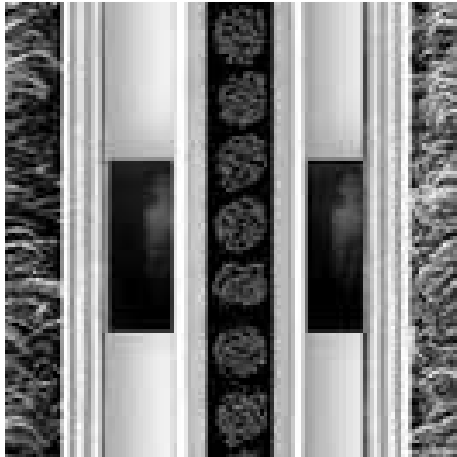

Black

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

