


Model 522 PSL Maximus B

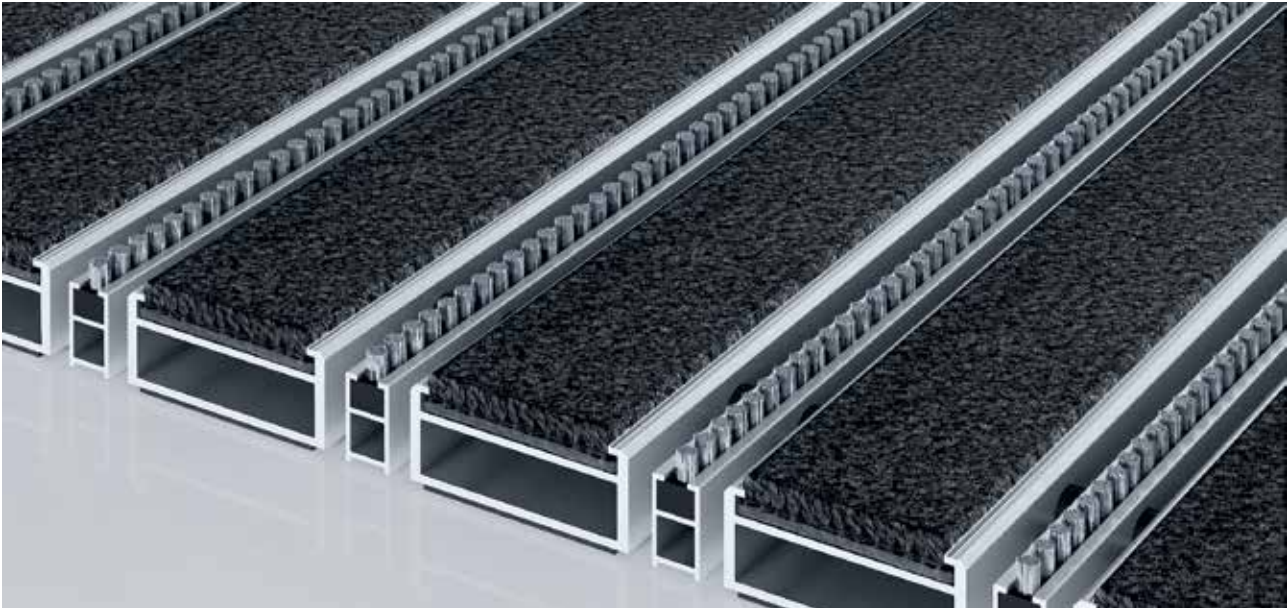

The extra-wide premium entrance mat with the stylish, carpet-look Maximus insert stands out from the crowd with its premium-quality tufted velour and high-end design. Particularly ideal for collecting fine dirt. The additional profile offers even more cleaning power. Optimally designed for buildings exposed to extreme footfall.

- 1
 - 2
 - 3
- Indoor and outdoor (covered, Zone 1+2)

Description

Roll-up, extremely hard-wearing Premium entrance mat with extra-wide profiles and Performance insert for recess installation. Can be rolled over and even driven over. Customise the width and depth without alignment profile. Available in any geometric shape.

				
Indoor and outdoor (covered, Zone 1+2)	Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.	Damp street dust, damp sand deposits, dust, etc.	5 years guarantee	class 32 (general commercial use)

emco MARSCHALL Premium Large With Maximus insert and brush strip

Model 522 PSL Maximus B

Approx. height (mm)	22	Accessories
Roll-over and drive-over capability:	Prams	emco installation frame 500: 500-25 AL Aluminium
	Sack-/hand truck	emco installation frame 500: N500-25 AL Aluminium
	Wheelchairs	emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)
Standard profile clearance approx. (mm)	5 mm, rubber spacers	emco installation frame 500: N500-25 CN Chrome-nickel steel (V2A)
Automatic door systems	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	emco LUMINA: LUMINA + LED Aluminium
		emco LUMINA: LUMINA Aluminium
Connection	Plastic-coated stainless steel cable	emco LUMINA: LUMINA VIA Aluminium
Max. width/profile length for individual section (mm):	3000	emco ramp edge: A17 Aluminium
		emco T-profile: T22
Profile width (mm)	46.5	emco cover strip: C22 Chrome-nickel steel (V2A)
Depth/walking depth for individual section (mm):	800	emco INOX®: LINEO 22 Chrome-nickel steel (V2A)
		emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)
Weight (kg/m²)	14,4	Rubber underlay 1 mm: GU 1
Mat divisions as per factory standards or customer specifications	As of a profile length of 3000 mm or a maximum mat weight of 45 kg	Rubber underlay 3 mm: GU 3
		Rubber underlay 5 mm: GU 5
Support chassis	Reinforced support chassis made using rigid aluminium with Premium sound absorbing insulation on the underside	Mat joining brackets: MV Supplied as standard with mats in several parts
Tread surface	Embedded, robust MAXIMUS inserts in Bfl-S1 quality (clean-off floor covering made from special polyamide yarn, 100%)	Suitable for:
		Residential and care homes
Flammability	Insert with fire classification Bfl-s1 according to EN 13501.	Arena
Pile material	100% PA 6.6 (polyamide)	medical practice
Use classification EN1307	class 33 (heavy commercial use)	Train station
		DIY store
		Offices and administrative buildings
		Family home
		Shopping centre
		Retail sector
		University / Higher education institution
		airport
		Hotel
		Industry
		Kindergarten/Nursery
		Warehouse
		Apartment building
		Trade fair
		School
		Sports hall

Model 522 PSL Maximus B

Service and services	Installation service
Construction site advice	Fitting and installation service
Dimensioning	Repairs
Measured using laser measuring device on site.	The product can be disposed of or recycled in an environmentally friendly way.

Model 522 PSL Maximus B

Colours



Black 80.01



Black mottled 81.01




Anthracite 80.02



Brown 80.04



Red 80.07

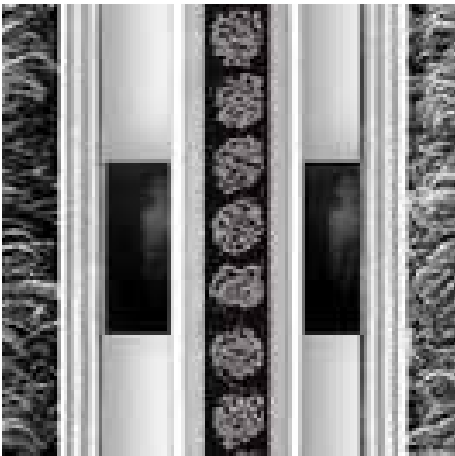


grey

emco MARSCHALL Premium Large With Maximus insert and brush strip

Model 522 PSL Maximus B

Colours

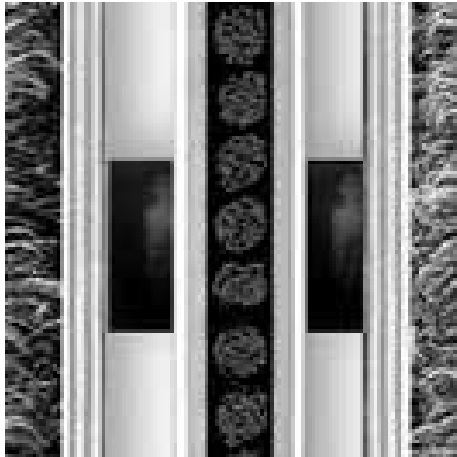

Black

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

EMCO