


# Model 522 PSL Outdoor

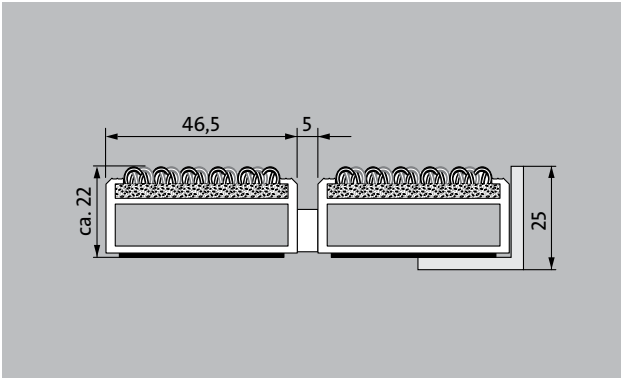

The extra-wide and weather-resistant premium entrance mat with the Outdoor insert for noticeably thorough removal of coarse dirt. Optimally designed for buildings exposed to extreme footfall.

**1** **2** **3** Outside (Zone 1)

**Description**

Roll-up, extremely hard-wearing Premium entrance mat with extra-wide profiles and Performance insert for recess installation. Can be rolled over and even driven over. Customise the width and depth without alignment profile. Available in any geometric shape.



Outside (Zone 1)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, loose chippings, coarse sand, small gravel particles



R 11 slip resistance as per DIN 51130



5 years guarantee



Cfl-s1



class 33 (heavy commercial use)

# emco MARSCHALL Premium Large With Outdoor insert

## Model 522 PSL Outdoor


<b>Approx. height (mm)</b>	22	<b>Bacterial reduction klebsiella pneumoniae ASTM-e2149</b>	9,8 %
<b>Roll-over and drive-over capability:</b>	Prams	<b>Accessories</b>	
	Sack-/hand truck		
	Wheelchairs		
	Light shopping trolleys		
	hand trolleys		
	pallet trucks		
	Electric lift truck		
	Cars		
Lifting platform (i.e scissor lift )			
<b>Standard profile clearance approx. (mm)</b>	5 mm, rubber spacers	emco installation frame 500: 500-25 AL Aluminium	
<b>Automatic door systems</b>	Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005	emco installation frame 500: N500-25 AL Aluminium	
<b>Connection</b>	Plastic-coated stainless steel cable	emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A)	
<b>Max. width/profile length for individual section (mm):</b>	3000	emco installation frame 500: N500-25 CN Chrome-nickel steel (V2A)	
<b>Profile width (mm)</b>	46.5	emco LUMINA: LUMINA + LED Aluminium	
<b>Depth/walking depth for individual section (mm):</b>	800	emco LUMINA: LUMINA Aluminium	
<b>Weight (kg/m<sup>2</sup>)</b>	13,8	emco LUMINA: LUMINA VIA Aluminium	
<b>Mat divisions as per factory standards or customer specifications</b>	As of a profile length of 3000 mm or a maximum mat weight of 45 kg	emco ramp edge: A17 Aluminium	
<b>Support chassis</b>	Reinforced support chassis made using rigid aluminium with Premium sound absorbing insulation on the underside	emco T-profile: T22	
<b>Tread surface</b>	The weather-resistant Outdoor insert for noticeably thorough removal of coarse dirt.	emco cover strip: C22 Chrome-nickel steel (V2A)	
<b>Slip resistance</b>	R 11 slip resistance as per DIN 51130	emco INOX®: LINEO 22 Chrome-nickel steel (V2A)	
<b>Flammability</b>	Fire classification for the complete mat system Cfl-s1 in accordance with EN 13501	emco INOX®: QUADRO 22 Chrome-nickel steel (V2A)	
<b>Pile material</b>	100% PA 6 (polyamide)	emco dirt collection well: 5000 AL Aluminium	
<b>Use classification EN1307</b>	class 33 (heavy commercial use)	emco dirt collection well: 5000 CN Chrome-nickel steel (V2A)	
<b>Colour fastness to artificial light ISO 105-B02</b>	excellent 7	emco dirt collection well: 5000 AL+ Aluminium	
<b>Colour fastness to rubbing ISO 105 X12</b>	good 4-5	emco dirt collection well: 5000 CN+ Chrome-nickel steel (V2A)	
<b>Colour fastness to water ISO 105 E01</b>	good 4-5	emco dirt collection well: 5022 AL Aluminium	
<b>Bacterial reduction EHEC ASTM-e2149</b>	22,4 %	emco dirt collection well: 5022 CN Chrome-nickel steel (V2A)	
<b>Bacterial reduction staphylococcus aureus ASTM-e2149</b>	17,3 %	emco dirt collection well: 5022 AL+ Aluminium	
		emco dirt collection well: 5022 CN+ Chrome-nickel steel (V2A)	
		emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment.	
		emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles	
		emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles	
		Rubber underlay 1 mm: GU 1	
		Rubber underlay 3 mm: GU 3	
		Rubber underlay 5 mm: GU 5	
		Mat joining brackets: MV Supplied as standard with mats in several parts	

## Model 522 PSL Outdoor


<b>Suitable for:</b>	Warehouse
Residential and care homes	Apartment building
Arena	Trade fair
medical practice	School
Train station	Sports hall
DIY store	Supermarket
Offices and administrative buildings	
Family home	<b>Service and services</b>
Shopping centre	Construction site advice
Retail sector	Dimensioning
University / Higher education institution	Measured using laser measuring device on site.
airport	Installation service
Hotel	Fitting and installation service
Industry	Repairs
Kindergarten/Nursery	The product can be disposed of or recycled in an environmentally friendly way.
Clinic/Hospital	

## Model 522 PSL Outdoor


### Colours

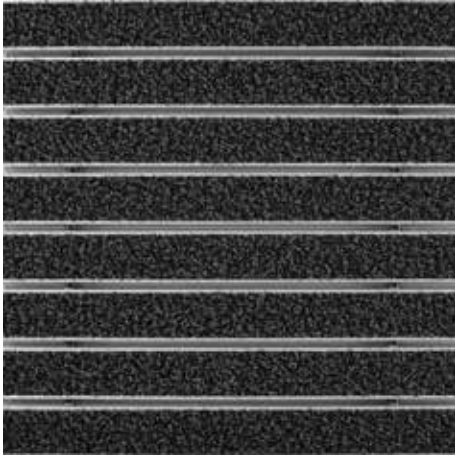

Anthracite

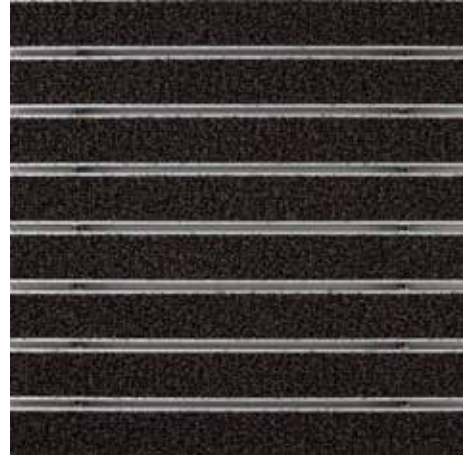

Brown

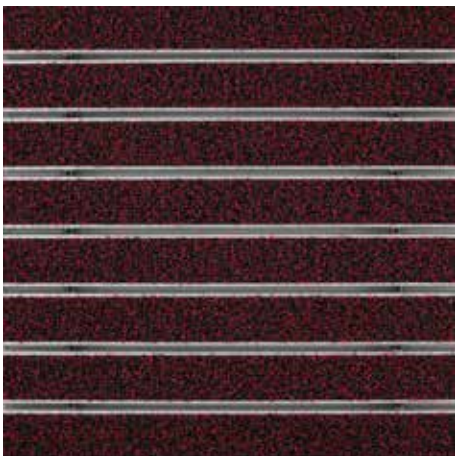

Red

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · www.emco-bau.com

