


Model FAVORIT







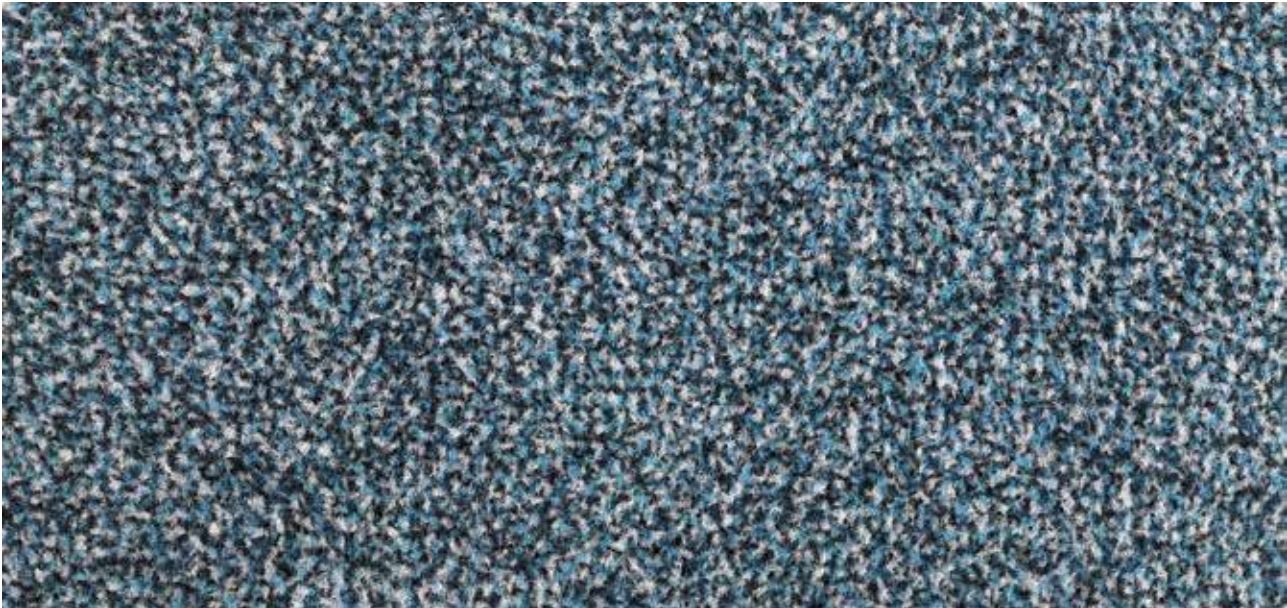



An excellent preventive measure

1 2 **3** Indoor areas (zone 3)

Description

emco FAVORIT has proven to be as hard-wearing and functional in many entrances and other usage locations in the residential and office areas as you can expect from a product for preventive cleaning. The discreet patterns and colours are retained in spite of continuous use.

 Anti-static	 Castor-resistant	 Suitable for stairs	 DS (EN 13893)	 Resistant strength
 Cfl-s1	 High	 class 33 (heavy commercial use)		


Clean-off system

Model FAVORIT

Construction	Tufting velour 5/32"	Brand	emco
Pile above substrate	100% polyamide	Suitable for:	
Substrate material	Polyester fleece	Residential and care homes	
Backing material	Heavy coating	Arena	
Pile weight / fibre weight	850	medical practice	
Total weight (g/m²)	3.430	Train station	
Overall height (mm)	7	DIY store	
Tuft density/m²	88.190	Offices and administrative buildings	
Slip resistance	DS (EN 13893)	Family home	
Certificates	CE conformity EN 14041 (rolls only)	Shopping centre	
Supplied as rolls	90 cm wide (incl. border)	Retail sector	
	130 cm wide (incl. border)	University / Higher education institution	
	200 cm wide (incl. border)	airport	
Supplied as mats	40 x 60 cm (incl. border)	Hotel	
	60 x 90 cm (incl. border)	Industry	
	90 x 120 cm (incl. border)	Kindergarten/Nursery	
	90 x 150 cm (incl. border)	Clinic/Hospital	
Product characteristics	Soiling and moisture absorption	Warehouse	
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.	Apartment building	
		Trade fair	
		School	
		Sports hall	
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).	Supermarket	

Model FAVORIT


Colours

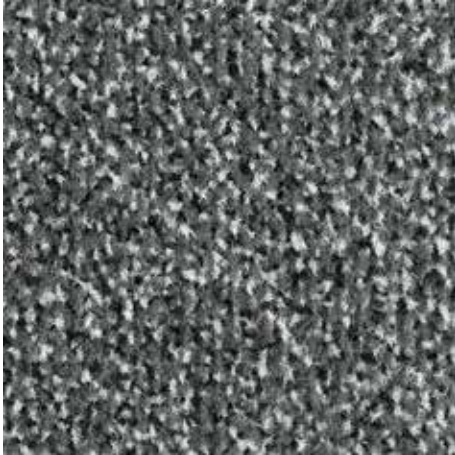


33.01 Anthracite



33.02 Brown

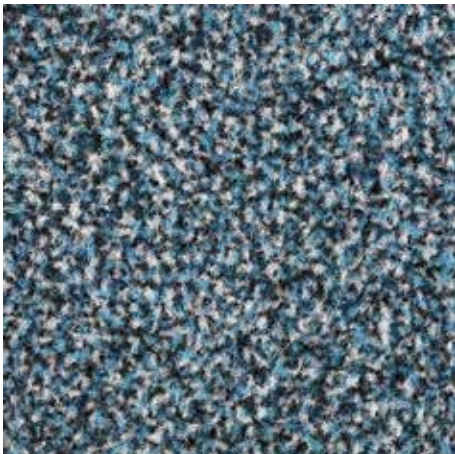

33.03 Blue

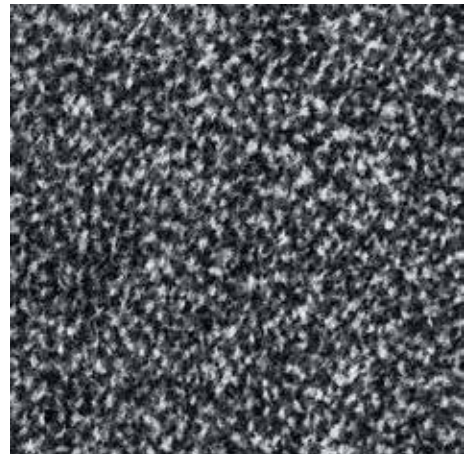

33.04 Graphite



33.10 black

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com