


Clean-off system

Model INNOVA





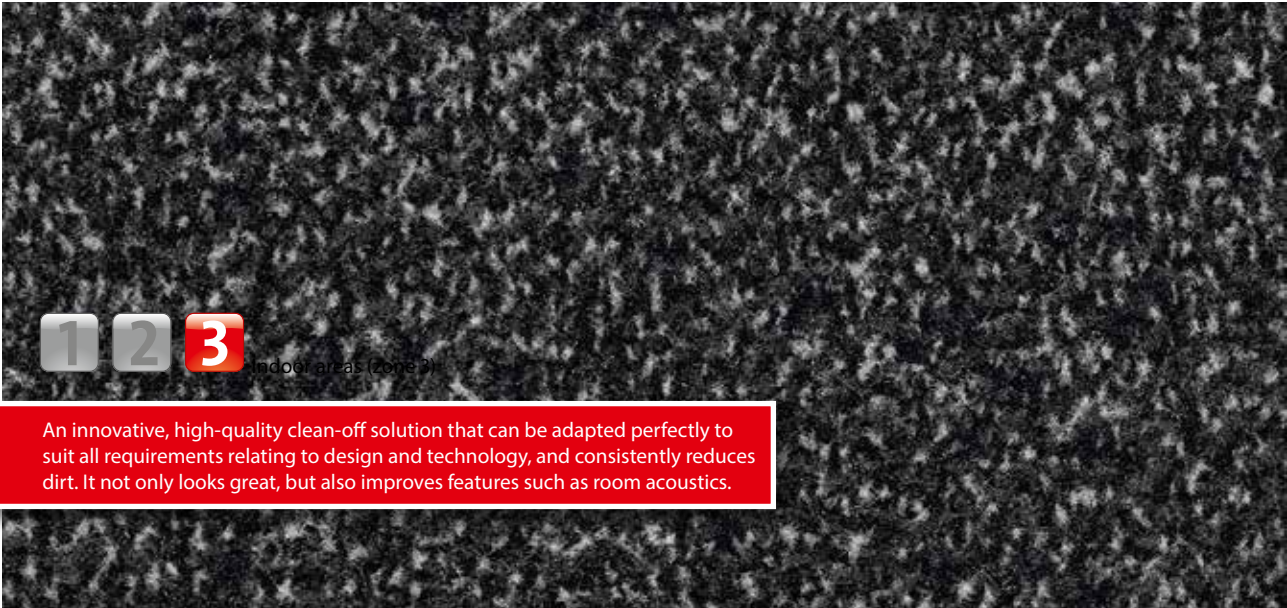





An innovative, high-quality clean-off solution that can be adapted perfectly to suit all requirements relating to design and technology, and consistently reduces dirt. It not only looks great, but also improves features such as room acoustics.








Description

An innovative, high-quality clean-off solution that can be adapted perfectly to suit all requirements relating to design and technology, and consistently reduces dirt. It not only looks great, but also improves features such as room acoustics.

-   
Anti-static
-   
Castor-resistant
-   
Suitable for stairs
-   
DS (EN 13893)
-   
Resistant strength
-   
Cfl-s1
-   
High
-   
Highly suitable for property

Colours

-   
36.01 black
-   
36.02 anthracite
-   
36.03 grey
-   
36.08 mocha
-   
36.10 slate

## Model INNOVA

<b>Construction</b>	Tufting velour 5/32"
<b>Pile above substrate</b>	100% polyamide
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	Heavy coating
<b>Pile weight / fibre weight</b>	885
<b>Total weight (g/m<sup>2</sup>)</b>	3430
<b>Overall height (mm)</b>	8
<b>Tuft density/m<sup>2</sup></b>	75590
<b>Slip resistance</b>	DS (EN 13893)
<b>Certificates</b>	CE conformity EN 14041 (rolls only)
<b>Supplied as rolls</b>	100 cm wide (incl. border) 150 cm wide (incl. border) 200 cm wide (incl. border)
<b>Supplied as mats</b>	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border) 200 x 300 cm (incl. border)
<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
<b>Cleaning</b>	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).

<b>Brand</b>	emco
--------------	------

<b>Suitable for:</b>
Residential and care homes
Arena
medical practice
Train station
DIY store
Offices and administrative buildings
Family home
Shopping centre
Retail sector
University / Higher education institution
airport
Hotel
Industry
Kindergarten/Nursery
Clinic/Hospital
Warehouse
Apartment building
Trade fair
School
Sports hall
Supermarket

Subject to technical modifications