


Clean-off system

Model MAXIMUS® Image

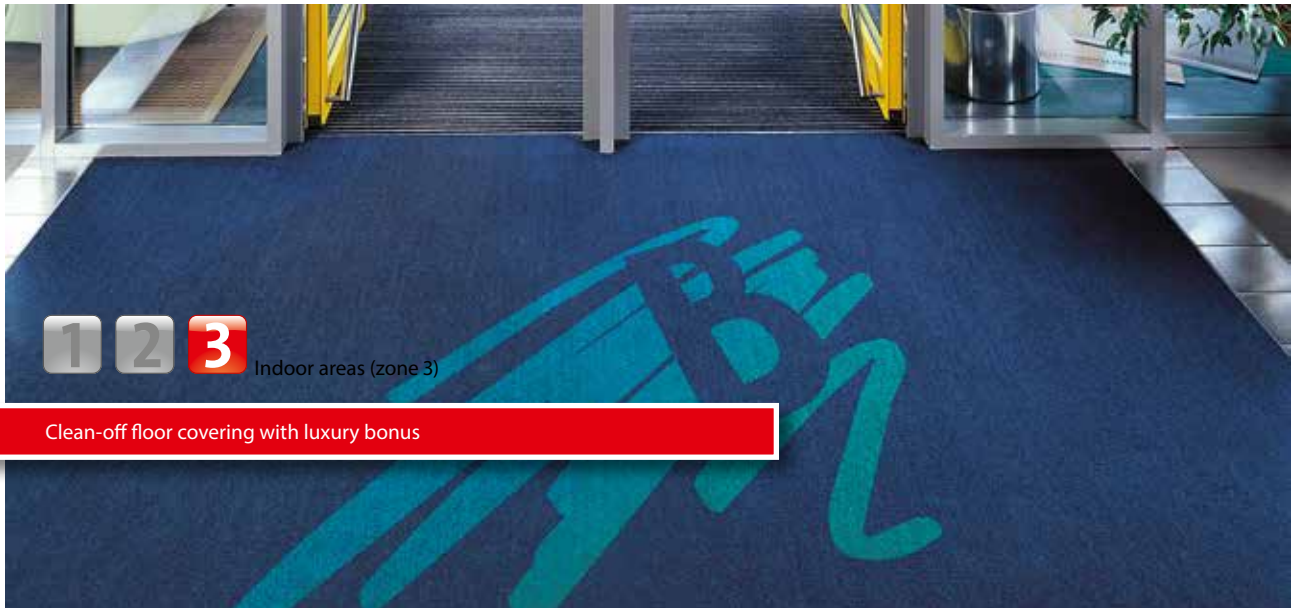

Description

MAXIMUS® IMAGE combines MAXIMUS® quality with all the benefits of individual design. Available in 45 bright colours as standard, an innovative production technique (chromojet) means that all pantone colours or individually mixed colours can also be used. With MAXIMUS® IMAGE you can produce abstract designs or create products that fit in with a specific corporate identity (bearing logos or in company colours, for example) in order to achieve the maximum advertising benefit and put across exactly what information you want.



Anti-static



Castor-res-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Bfl-s1

































Luxurious



Highly
suitable for
property

Model MAXIMUS® Image

Colours

							
I10 Lemon	I20 Yellow	I30 Yellow/ orange	I40 Orange	I50 Terracotta	I60 Red	I70 Oxide red	I80 Bordeaux
							
I90 Light red	I100 Cherry	I110 Purple	I120 Lilac	I130 Grape	I140 Magenta	I150 Peach	I160 Royal blue
							
I170 Light blue	I180 Petrol blue	I190 Emerald green	I200 Marine blue	I210 Dark green	I220 Mint	I230 Leaf green	I240 Reed green
							
I250 Green	I260 Brown	I270 Graphite	I280 Steel blue	I290 Light blue	I300 Silver	I310 Fawn brown	I320 Sand
							
I330 Chestnut	I340 Grey beige	I350 Blue grey	I360 Light grey	I370 Grey	I380 Dark grey	I390 Black	I400 White*
							
I410 Steel grey	I420 Gold	I430 Salmon pink	I440 Light green	I450 Sunset			

Clean-off system

Model MAXIMUS® Image

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	1000
Total weight (g/m²)	3410
Overall height (mm)	9
Tuft density/m²	138600
Slip resistance	DS (EN 13893)
Supplied as rolls	Made to measure up to a max. width of 200 cm Special dimensions on request
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.

Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Suitable for:

Residential and care homes

medical practice

Offices and administrative buildings

Family home

Hotel

Kindergarten/Nursery

Apartment building

School

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com