


Clean-off system

Model MAXIMUS® Image

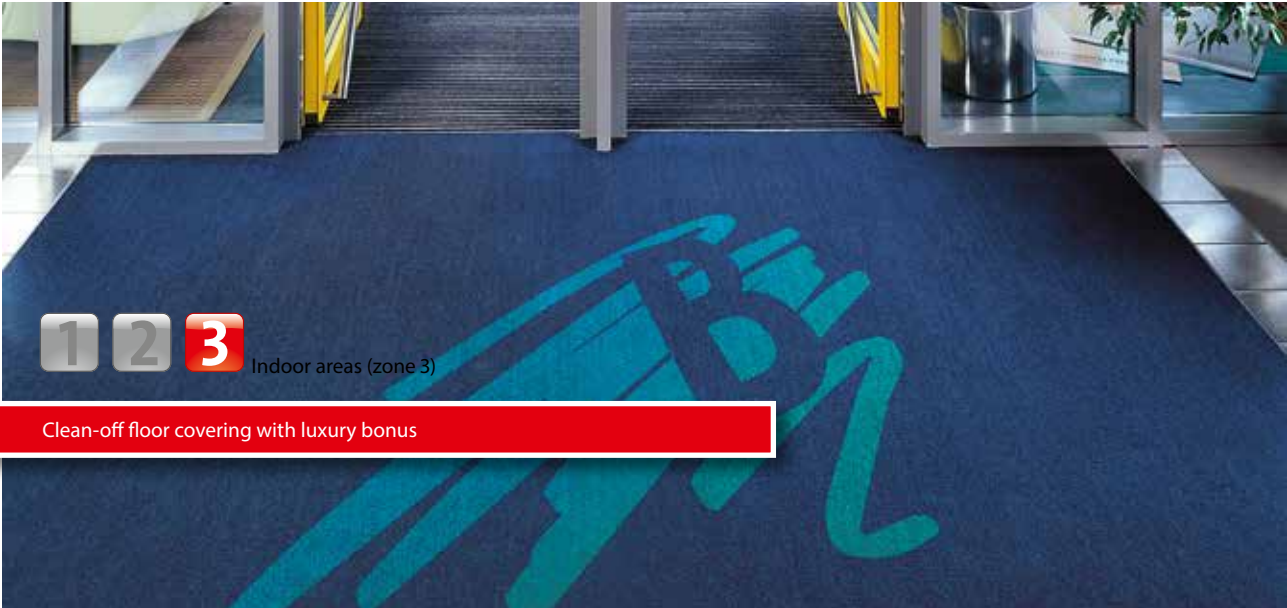

Description

MAXIMUS® IMAGE combines MAXIMUS® quality with all the benefits of individual design. Available in 45 bright colours as standard, an innovative production technique (chromojet) means that all pantone colours or individually mixed colours can also be used. With MAXIMUS® IMAGE you can produce abstract designs or create products that fit in with a specific corporate identity (bearing logos or in company colours, for example) in order to achieve the maximum advertising benefit and put across exactly what information you want.



Anti-static



Castor-res-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Bfl-s1



Luxurious



class 33 (heavy
commercial
use)

Model MAXIMUS® Image

Colours



Clean-off system

Model MAXIMUS® Image

Construction	Tufting-Velours 1/8"
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	1.000
Total weight (g/m²)	3.410
Overall height (mm)	9
Dimension tolerance in %	2
Tuft density/m²	138.600
Slip resistance	DS (EN 13893)
Supplied as rolls	Made to measure up to a max. width of 200 cm Special dimensions on request
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.

Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Suitable for:
Residential and care homes
medical practice
Offices and administrative buildings
Family home
Hotel
Kindergarten/Nursery
Apartment building
School

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.: +49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@emco.de · www.emco-bau.com