







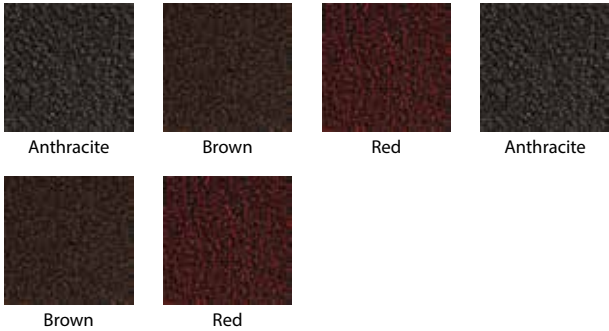


Model OUTDOOR

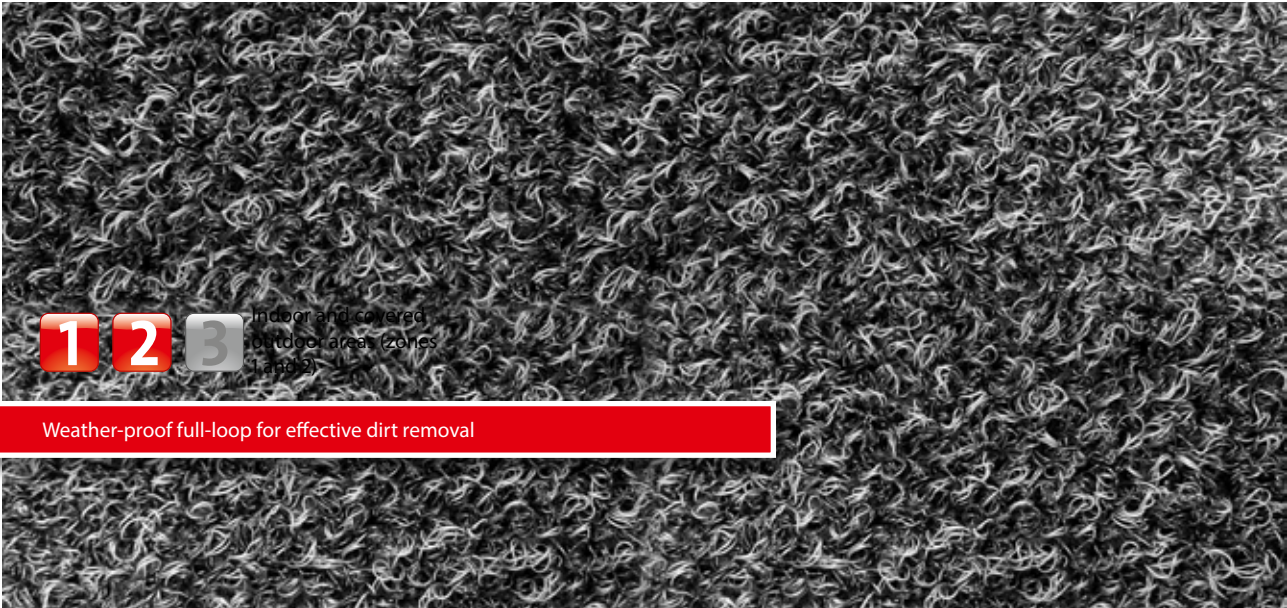

-  Anti-static
-  Suitable for stairs
-  DS (EN 13893)
-  Resistant strength
-  Cfl-s1
-  Comfort level: simple
-  Highly suitable for property

Colours



Clean-off system

Model OUTDOOR

Construction	5/32" tufting
Pile above substrate	100% polyamide
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	600
Total weight (g/m²)	3200
Overall height (mm)	8
Tuft density/m²	64000
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	100 cm wide (incl. border) 200 cm wide (incl. border)

Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border)
Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com

