



Model SCRATCH

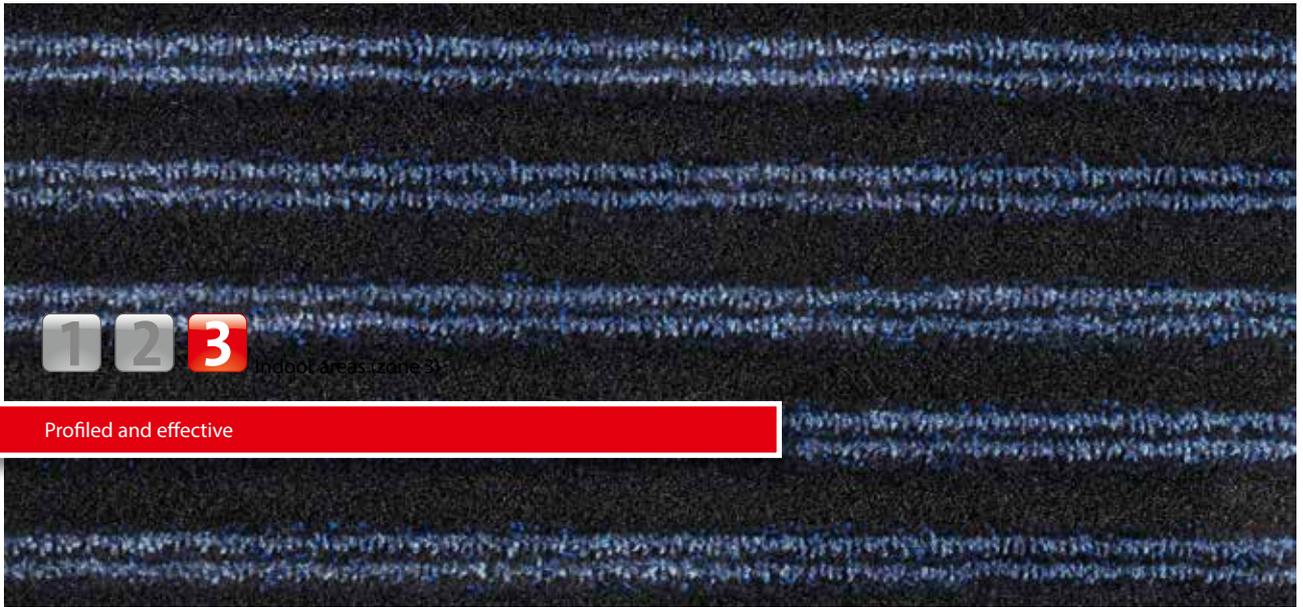

1 2 3

Indoor areas (zone 3)

Profiled and effective

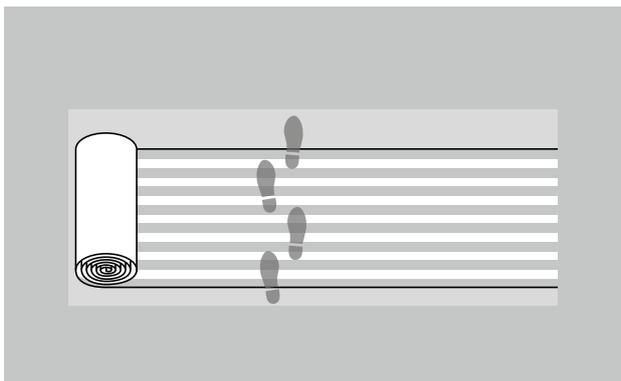

Description

emco SCRATCH2 fulfils a dual function by means of a new type of material combination: Coarse dirt is brushed off and moisture is absorbed in the best possible way. Up to 90% less dirt is carried into the interior. This ensures that the value of your carpet, parquet flooring or stone floor is effectively retained. An investment that pays for itself: emco SCRATCH2 saves up to 65% of cleaning costs. In order to benefit from the maximum clean-off effect, emco SCRATCH2 should be laid with the rows running at right angles to the direction in which people will walk across it.



Anti-static



Castor-res-
tant



Suitable for
stairs



DS (EN 13893)



Resistant
strength



Cfl-s1




good



Highly
suitable for
property


Colours




40.01 Anthracite




40.02 Blue



40.03 Brown



40.04 Red



40.05 Grey

Clean-off system

Model SCRATCH

Construction	Tufting velour 5/32"
Pile above substrate	100% polymide combined with fibrilised monofilaments
Substrate material	Polyester fleece
Backing material	Heavy coating
Pile weight / fibre weight	1.150
Slip resistance	DS (EN 13893)
Certificates	CE conformity EN 14041 (rolls only)
Supplied as rolls	200 cm wide (incl. border)
Supplied as mats	60 x 90 cm (incl. border) 90 x 150 cm (incl. border) 130 x 200 cm (incl. border)

Product characteristics	Soiling and moisture absorption
Laying	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
Cleaning	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
Brand	emco

Subject to technical modifications

emco Bautechnik GmbH · Memeler Straße 30 · D-42781 Haan · Germany · Tel.:
+49 (0)21 29/34 75 80 · Telefax: +49 (0)21 29/34 75 810 · E-Mail: sauberlauf@
emco.de · www.emco-bau.com

