
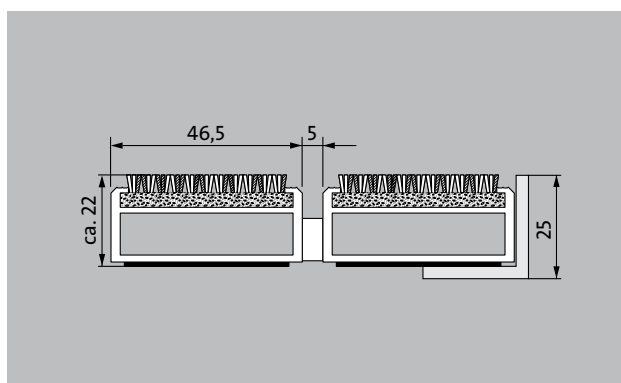


Model 522 PSL Conform

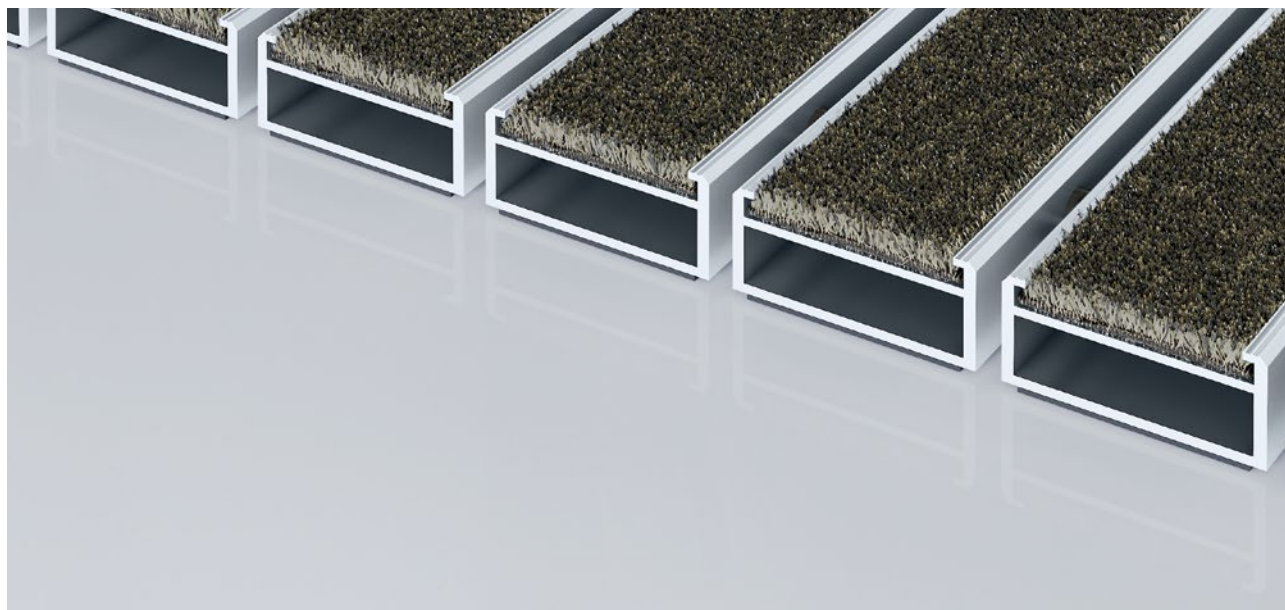

The extra-wide premium entrance mat with the Conform insert made of recycled materials is the perfect complement to wooden surroundings and can be used in a whole host of environments. Particularly ideal for collecting fine dirt. Optimally designed for buildings exposed to extreme footfall.

1 **2** **3** Indoor and outdoor
(covered, Zone 1+2)

Description

Roll-up, extremely hard-wearing Premium entrance mat with extra-wide profiles and Performance insert for recess installation. Can be rolled over and even driven over. Customise the width and depth without alignment profile. Available in any geometric shape.



Indoor and outdoor (covered, Zone 1+2)



Street dust, hair, sand, ash, textile fibres, small leaves and twigs, etc.



Damp street dust, damp sand deposits, dust, etc.



R 12 slip resistance as per DIN 51130



5 years guarantee



Cfl-s1



Property suitable inlay 32



Model 522 PSL Conform

| | |
|---|---|
| Approx. height (mm) | 22 |
| Note on height | The insert can actually be approx. 2 mm higher due to the wear layer. |
| Roll-over and drive-over capability: | <p>Prams</p> <p>Sack-/hand truck</p> <p>Wheelchairs</p> <p>Light shopping trolleys</p> <p>hand trolleys</p> <p>pallet trucks</p> <p>Electric lift truck</p> <p>Cars</p> <p>Lifting platform (i.e scissor lift)</p> |
| Standard profile clearance approx. (mm) | 5 mm, rubber spacers |
| Automatic door systems | Profile gaps, for revolving doors, available in 3mm according to DIN EN 16005 |
| Connection | Plastic-coated stainless steel cable |
| Max. width/profile length for individual section (mm): | 3000 |
| Profile width (mm) | 46.5 |
| Weight (kg/m²) | 14,5 |
| Mat division as per factory standards | From a profile length of 3000 mm or a maximum mat weight of 30 kg. For profile lengths above 2300 mm, a surcharge is applicable . Mat deviations/ splits possible at customer's request. |
| Support chassis | Reinforced support chassis made using rigid aluminium with sound absorbing insulation on the underside |
| Support chassis colour | Standard natural anodized Anodised colours for an additional charge: EV3 gold, C33 mid-bronze, C35 black or C31 stainless steel |
| Tread surface | The Conform insert made of recycled materials is the perfect complement to wooden surroundings and can be used in a whole host of environments. |
| Slip resistance | R 12 slip resistance as per DIN 51130 |
| Flammability | Fire classification for the complete mat system Cfl-s1 in accordance with EN 13501 |
| Pile material | 100% PA 6 (polyamide) |
| Use classification EN1307 | Property suitable inlay 33 |
| Bacterial reduction EHEC ASTM-e2149 | 16,1 % |

| | |
|---|--------|
| Bacterial reduction staphylococcus aureus ASTM-e2149 | 0,0 % |
| Bacterial reduction klebsiella pneumoniae ASTM-e2149 | 65,6 % |

Model 522 PSL Conform

Accessories

| |
|--|
| emco installation frame 500: 500-25 AL Aluminium |
| emco installation frame 500: 500-25 CN Chrome-nickel steel (V2A) |
| emco ramp edge: A17 Aluminium |
| emco T-profile: T22 |
| emco cover strip: C22 Chrome-nickel steel (V2A) |
| emco INOX®: LINEO 22 Chrome-nickel steel (V2A) |
| emco INOX®: QUADRO 22 Chrome-nickel steel (V2A) |
| emco dirt collection well: 5000 AL Aluminium |
| emco dirt collection well: 5000 CN Chrome-nickel steel (V2A) |
| emco dirt collection well: 5000 AL+ Aluminium |
| emco dirt collection well: 5000 CN+ Chrome-nickel steel (V2A) |
| emco dirt collection well: 5022 AL Aluminium |
| emco dirt collection well: 5022 CN Chrome-nickel steel (V2A) |
| emco dirt collection well: 5022 AL+ Aluminium |
| emco dirt collection well: 5022 CN+ Chrome-nickel steel (V2A) |
| emco dirt collection well: 5522AL Aluminium |
| emco dirt collection well: 5522CN Chrome-nickel steel (V2A) |
| emco dirt collection well: 5022 AL Aluminium |
| emco dirt collection well: 5022 CN Chrome-nickel steel (V2A) |
| emco dirt collection well: 5022 AL+ Aluminium |
| emco dirt collection well: 5022 CN+ Chrome-nickel steel (V2A) |
| emco dirt collection well: 5000 AL Aluminium |
| emco dirt collection well: 5000 CN Chrome-nickel steel (V2A) |
| emco dirt collection well: 5000 AL+ Aluminium |
| emco dirt collection well: 5000 CN+ Chrome-nickel steel (V2A) |
| emco special frame with substructure: A Version A: with installation frame, rectangular tube profiles, grid support and height adjustment. |
| emco special frame with substructure: B Version B: with installation frame, grid support and rectangular tube profiles |
| emco special frame with substructure: C Type C: with installation frame and rectangular tube profiles |
| Rubber underlay 1 mm: GU 1 |
| Rubber underlay 3 mm: GU 3 |
| Rubber underlay 5 mm: GU 5 |
| Mat joining brackets: MV Supplied as standard with mats in several parts |

Suitable for:

| |
|---|
| Retirement homes and Care-/Nursery Homes |
| Arena |
| medical practice |
| Train station |
| DIY store |
| Offices and administrative buildings |
| Family home |
| Shopping centre |
| Retail sector |
| University / Higher education institution |
| airport |
| Hotel |
| Industry |
| Kindergarten/Nursery |
| Clinic/Hospital |
| Warehouse |
| Apartment building |
| Trade fair |
| School |
| Sports hall |
| Supermarket |

Insert certified to TÜV PROFiCERT- product interior (Standard)


| |
|---|
| French VOC regulation |
| LEED v4 (outside North America) |
| BREEAM Exemplary Level |
| Belgian VOC regulation |
| AgBB (Committee for Health-related Evaluation of Building Products) |
| MVV TB Appendix 8, 9 / ABG |

Service and services

| |
|--|
| Construction site advice |
| Dimensioning |
| Measured using laser measuring device on site. |
| Installation service |
| Fitting and installation service |
| Repairs |
| The product can be disposed of or recycled in an environmentally friendly way. |

Model 522 PSL Conform


Colours

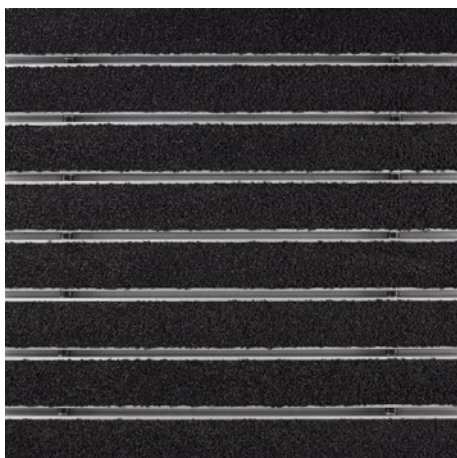

Anthracite 76.01



Beige 76.02

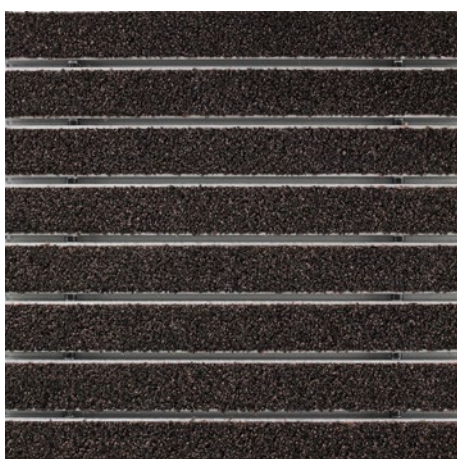

Brown 76.04

Warranty conditions are available at:
www.emco-bau.com/en/warranty-conditions/

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:
bau@emco.de · www.emco-bau.com

